

**Unmanned Maritime Autonomy Architecture (UMAA)
Communications Operations - Experimental (CO-EXP)
Interface Control Document (ICD)
(UMAA-SPEC-CO-EXPICD)**

MDE Version 5.0.1

UMAA Spec Commit 63fb9f9

Version 5.2.1
20 April 2022

Contents

1	Scope	7
1.1	Identification	7
1.2	Overview	7
1.3	Document Organization	9
2	Referenced Documents	10
3	Introduction to Data Model, Services, and Interfaces	11
3.1	Data Model	11
3.2	Definitions	11
3.3	Data Distribution Service (DDS TM)	11
3.4	Naming Conventions	12
3.5	Namespace Conventions	13
3.6	Cybersecurity	14
3.7	GUID algorithm	14
3.8	Large Collections	14
3.8.1	Necessary QoS	14
3.8.2	Updating Large Collections	14
3.8.3	Specifying an Empty Large Collection	15
3.8.4	Large Set Types	15
3.8.5	Large List Types	15
4	Flow Control	17
4.1	Command / Response	17
4.1.1	High-Level Flow	19
4.1.2	Command Startup Sequence	20
4.1.2.1	Service Provider Startup Sequence	20
4.1.2.2	Service Consumer Startup Sequence	21
4.1.3	Command Execution Sequences	22
4.1.4	Command Start Sequence	22
4.1.4.1	Command Execution	23
4.1.4.2	Updating a Command	24
4.1.4.3	Command Execution Success	25
4.1.4.4	Command Execution Failure	26
4.1.4.5	Command Canceled	27
4.1.5	Command Cleanup	27
4.1.6	Command Shutdown Sequence	28
4.1.6.1	Service Provider Shutdown Sequence	28
4.1.6.2	Service Consumer Shutdown Sequence	29
4.2	Request / Reply	30
4.2.1	Request/Reply without Query Data	30
4.2.1.1	Service Provider Startup Sequence	31
4.2.1.2	Service Consumer Startup Sequence	32
4.2.1.3	Service Provider Shutdown	32
4.2.1.4	Service Consumer Shutdown	32
4.2.2	Request/Reply with Query Data	33
5	Communications Operations - Experimental (CO-EXP) Services and Interfaces	34
5.1	Services and Interfaces	34
5.1.1	CommsChannelConfig	34
5.1.1.1	reportCommsChannelAddMessageConfigAck	35
5.1.1.2	reportCommsChannelAddMessageConfigCommandStatus	35
5.1.1.3	reportCommsChannelConfig	35
5.1.1.4	reportCommsChannelDeleteMessageConfigAck	36
5.1.1.5	reportCommsChannelDeleteMessageConfigCommandStatus	36
5.1.1.6	setCommsChannelAddMessageConfig	36

5.1.1.7	setCommsChannelDeleteMessageConfig	37
5.1.2	CommsChannelControl	37
5.1.2.1	reportCommsChannelClearAllCommandAck	38
5.1.2.2	reportCommsChannelClearAllCommandStatus	38
5.1.2.3	reportCommsChannelClearMessageCommandAck	39
5.1.2.4	reportCommsChannelClearMessageCommandStatus	39
5.1.2.5	reportCommsChannelResetCommandAck	39
5.1.2.6	reportCommsChannelResetCommandStatus	40
5.1.2.7	reportCommsChannelShutdownCommandAck	40
5.1.2.8	reportCommsChannelShutdownCommandStatus	40
5.1.2.9	reportCommsChannelStartupCommandAck	41
5.1.2.10	reportCommsChannelStartupCommandStatus	41
5.1.2.11	setCommsChannelClearAll	42
5.1.2.12	setCommsChannelClearMessage	42
5.1.2.13	setCommsChannelReset	42
5.1.2.14	setCommsChannelShutdown	43
5.1.2.15	setCommsChannelStartup	43
5.1.3	CommsChannelDataEncodingReport	43
5.1.3.1	reportCommsChannelDataEncoding	44
5.1.4	CommsChannelEnvironmentReport	44
5.1.4.1	reportCommsChannelEnvironment	44
5.1.5	CommsChannelPowerConfig	45
5.1.5.1	reportCommsChannelPowerConfig	45
5.1.5.2	reportCommsChannelPowerConfigAck	45
5.1.5.3	reportCommsChannelPowerConfigCommandStatus	46
5.1.5.4	setCommsChannelPowerConfig	46
5.1.6	CommsChannelPowerReport	46
5.1.6.1	reportCommsChannelPower	47
5.1.7	CommsChannelSpecs	47
5.1.7.1	reportCommsChannelSpecs	47
5.1.8	CommsChannelStatus	48
5.1.8.1	reportCommsChannel	48
5.1.8.2	reportCommsChannelReceiver	49
5.1.8.3	reportCommsChannelReceiverStatistics	49
5.1.8.4	reportCommsChannelSender	50
5.1.8.5	reportCommsChannelSenderStatistics	50
5.1.9	CommsChannelSystemTimeReport	50
5.1.9.1	reportCommsChannelSystemTime	51
5.1.10	ContactFilterConfig	51
5.1.10.1	reportContactFilterConfigAck	51
5.1.10.2	reportContactFilterConfigCommandStatus	52
5.1.10.3	setContactFilterConfig	52
5.1.11	MessageFilterConfig	53
5.1.11.1	reportMessageFilterConfigAck	53
5.1.11.2	reportMessageFilterConfigCommandStatus	53
5.1.11.3	setMessageFilterConfig	54
5.2	Common Data Types	55
5.2.1	UCSMDEInterfaceSet	55
5.2.2	UMAACommand	55
5.2.3	UMAAStatus	55
5.2.4	UMAACommandStatusBase	56
5.2.5	UMAACommandStatus	56
5.2.6	DateTime	56
5.2.7	AllFilterType	57
5.2.8	CommsChannelMessageConfigType	57
5.2.9	CommsChannelMessageType	57
5.2.10	CommsChannelReceiverStatisticsType	58
5.2.11	CommsChannelSenderStatisticsType	58

5.2.12	DecimateStructureFilterType	58
5.2.13	FrequencyRangeType	58
5.2.14	MessageFilterType	59
5.2.15	Quaternion	59
5.2.16	SendOnlyIfChangedFilterType	59
5.3	Enumerations	61
5.3.1	BufferPurgeOptionEnumType	61
5.3.2	CommandStatusReasonEnumType	61
5.3.3	CommsChannelOperationalStatusEnumType	62
5.3.4	CommandStatusEnumType	62
5.4	Type Definitions	63
A Appendices		65
A.1	Glossary	65
A.2	Acronyms	65

List of Figures

1	UMAA Functional Organization.	7
2	UMAA Services and Interfaces Example.	8
3	Services and Interfaces Exposed on the UMAA Data Bus.	11
4	State transitions of the <code>commandStatus</code> as commands are processed.	18
5	Valid <code>commandStatusReason</code> values for each <code>commandStatus</code> state transition. Entries marked with a (—) indicate that the state transition is invalid.	18
6	Sequence Diagram for the High-Level Description of a Command Execution.	19
7	Sequence Diagram for Command Startup.	20
8	Sequence Diagram for Command Startup for Service Providers.	21
9	Sequence Diagram for Command Startup for Service Consumers.	22
10	Sequence Diagram for the Start of a Command Execution.	23
11	Beginning Sequence Diagram for a Command Execution.	24
12	Sequence Diagram for Command Update.	25
13	Sequence Diagram for a Command That Completes Successfully.	25
14	Sequence Diagram for a Command That Fails due to Resource Failure.	26
15	Sequence Diagram for a Command That Times Out Before Completing.	26
16	Sequence Diagram for a Command That is Canceled by the Service Consumer Before the Service Provider can Complete It.	27
17	Sequence Diagram Showing Cleanup of the Bus When a Command Has Been Completed and the Service Consumer No Longer Wishes to Maintain the Commanded State.	28
18	Sequence Diagram for Command Shutdown.	28
19	Sequence Diagram for Command Shutdown for Service Providers.	29
20	Sequence Diagram for Command Shutdown for Service Consumers.	30
21	Sequence Diagram for a Request/Reply for Report Data That Does Not Require any Specific Query Data.	31
22	Sequence Diagram for Initialization of a Service Provider to Provide <code>FunctionReportTypes</code> .	32
23	Sequence Diagram for Initialization of a Service Consumer to Request <code>FunctionReportTypes</code> .	32
24	Sequence Diagram for Shutdown of a Service Provider.	32
25	Sequence Diagram for Shutdown of a Service Consumer.	33

List of Tables

1	Standards Documents	10
2	Government Documents	10
3	Service Requests and Associated Responses	12
4	LargeSetMetadata Structure Definition	15
5	Example FooReportTypeItemsSetElement Structure Definition	15
6	LargeListMetadata Structure Definition	16
7	Example FooReportTypeItemsListElement Structure Definition	16
8	CommsChannelConfig Operations	34

9	CommsChannelAddMessageConfigAckReportType Message Definition	35
10	CommsChannelAddMessageConfigCommandStatusType Message Definition	35
11	CommsChannelConfigReportType Message Definition	36
12	CommsChannelDeleteMessageConfigAckReportType Message Definition	36
13	CommsChannelDeleteMessageConfigCommandStatusType Message Definition	36
14	CommsChannelAddMessageConfigCommandType Message Definition	37
15	CommsChannelDeleteMessageConfigCommandType Message Definition	37
16	CommsChannelControl Operations	37
17	CommsChannelClearAllCommandAckReportType Message Definition	38
18	CommsChannelClearAllCommandStatusType Message Definition	38
19	CommsChannelClearMessageCommandAckReportType Message Definition	39
20	CommsChannelClearMessageCommandStatusType Message Definition	39
21	CommsChannelResetCommandAckReportType Message Definition	40
22	CommsChannelResetCommandStatusType Message Definition	40
23	CommsChannelShutdownCommandAckReportType Message Definition	40
24	CommsChannelShutdownCommandStatusType Message Definition	41
25	CommsChannelStartupCommandAckReportType Message Definition	41
26	CommsChannelStartupCommandStatusType Message Definition	41
27	CommsChannelClearAllCommandType Message Definition	42
28	CommsChannelClearMessageCommandType Message Definition	42
29	CommsChannelResetCommandType Message Definition	43
30	CommsChannelShutdownCommandType Message Definition	43
31	CommsChannelStartupCommandType Message Definition	43
32	CommsChannelDataEncodingReport Operations	43
33	CommsChannelDataEncodingReportType Message Definition	44
34	CommsChannelEnvironmentReport Operations	44
35	CommsChannelEnvironmentReportType Message Definition	44
36	CommsChannelPowerConfig Operations	45
37	CommsChannelPowerConfigReportType Message Definition	45
38	CommsChannelPowerConfigAckReportType Message Definition	46
39	CommsChannelPowerConfigCommandStatusType Message Definition	46
40	CommsChannelPowerConfigCommandType Message Definition	46
41	CommsChannelPowerReport Operations	47
42	CommsChannelPowerReportType Message Definition	47
43	CommsChannelSpecs Operations	47
44	CommsChannelSpecsReportType Message Definition	48
45	CommsChannelStatus Operations	48
46	CommsChannelReportType Message Definition	48
47	CommsChannelReceiverReportType Message Definition	49
48	CommsChannelReceiverStatisticsReportType Message Definition	49
49	CommsChannelSenderReportType Message Definition	50
50	CommsChannelSenderStatisticsReportType Message Definition	50
51	CommsChannelSystemTimeReport Operations	50
52	CommsChannelSystemTimeReportType Message Definition	51
53	ContactFilterConfig Operations	51
54	ContactFilterConfigAckReportType Message Definition	51
55	ContactFilterConfigCommandStatusType Message Definition	52
56	ContactFilterConfigCommandType Message Definition	52
57	MessageFilterConfig Operations	53
58	MessageFilterConfigAckReportType Message Definition	53
59	MessageFilterConfigCommandStatusType Message Definition	54
60	MessageFilterConfigCommandType Message Definition	54
61	UCSMDEInterfaceSet Structure Definition	55
62	UMAACommand Structure Definition	55
63	UMAASStatus Structure Definition	55
64	UMAACommandStatusBase Structure Definition	56
65	UMAACommandStatus Structure Definition	56
66	DateTime Structure Definition	56

67	AllFilterType Structure Definition	57
68	CommsChannelMessageConfigType Structure Definition	57
69	CommsChannelMessageType Structure Definition	57
70	CommsChannelReceiverStatisticsType Structure Definition	58
71	CommsChannelSenderStatisticsType Structure Definition	58
72	DecimateStructureFilterType Structure Definition	58
73	FrequencyRangeType Structure Definition	59
74	MessageFilterType Union(s)	59
75	Quaternion Structure Definition	59
76	SendOnlyIfChangedFilterType Structure Definition	60
77	BufferPurgeOptionEnumType Enumeration	61
78	CommandStatusReasonEnumType Enumeration	61
79	CommsChannelOperationalStatusEnumType Enumeration	62
80	CommandStatusEnumType Enumeration	62
81	Type Definitions	63

1 Scope

1.1 Identification

This document defines a set of *experimental* services as part of the Unmanned Maritime Autonomy Architecture (UMAA)—experimental services are not required to satisfy UMAA compliance, but are provided to industry for feedback. This document defines a set of services as part of the Unmanned Maritime Autonomy Architecture (UMAA). As such, it provides services that focus on managing the radios, communications channels, data flow, and message transport between the unmanned vehicle and off-board entities such as operations centers, other manned platforms, or other collaborating unmanned vehicles. The services and their corresponding interfaces covered in this ICD encompass the capability to communicate with an Unmanned Maritime Vehicle (UMV) (surface or undersea). This document is generated automatically from data models that define its services and their interfaces as part of the Unmanned Systems (UxS) Control Segment (UCS) Architecture as extended by UMAA to provide autonomy services for unmanned vehicles.

To put each ICD in context of the UMAA Architecture Design Description (ADD), the UMAA functional decomposition mapping to UMAA ICDs is shown in Figure 1.

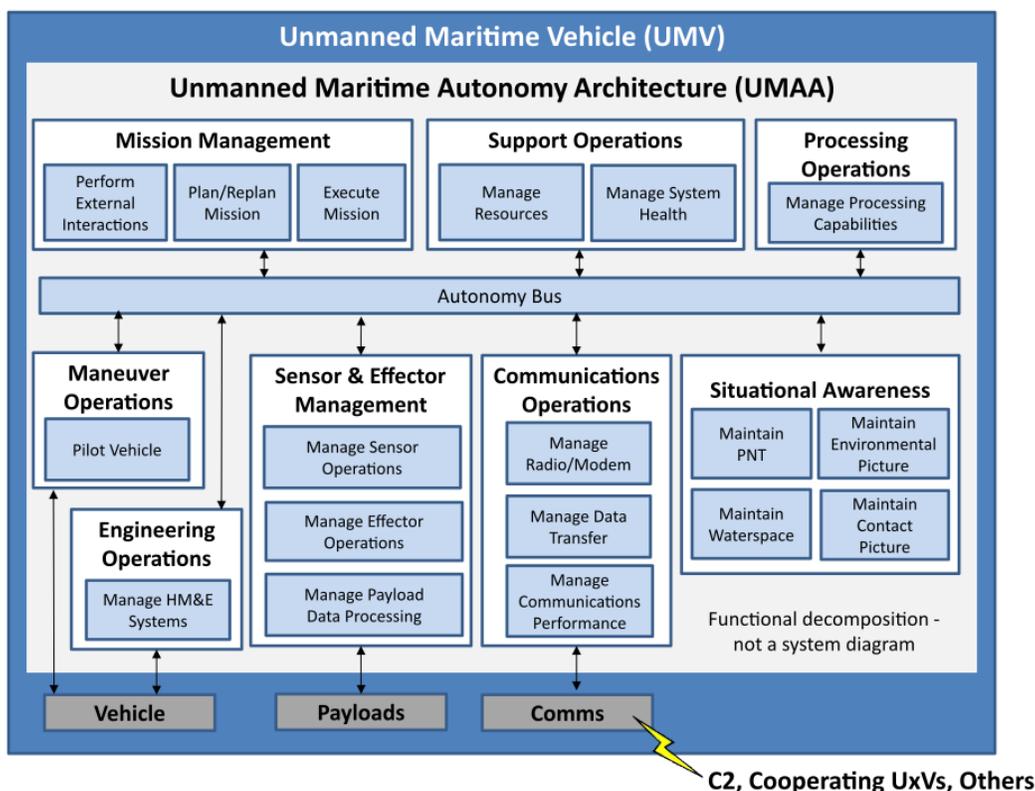


Figure 1: UMAA Functional Organization.

1.2 Overview

The fundamental purpose of UMAA is to promote the development of common, modular, and scalable software for unmanned vehicles that is independent of a particular autonomy implementation. Unmanned Maritime Systems (UMSs) consist of Command and Control (C2), one or more unmanned vehicles, and support equipment and software (e.g. recovery system, Post Mission Analysis applications). The scope of UMAA is focused on the autonomy that resides on-board the unmanned vehicle. This includes the autonomy for all classes of unmanned vehicles and must support varying levels of communication in mission (i.e., constant, intermittent, or none) with external systems. To enable modular development and upgrade of the functional capabilities of the on-board autonomy, UMAA defines eight high-level functions. These core functions include: Communications Operations, Engineering Operations, Maneuver Operations, Mission Management, Processing Operations, Sensor and Effector Operations, Situational Awareness, and Support Operations. In each of these areas, it is anticipated that new capabilities will be required to satisfy evolving Navy missions over time. UMAA seeks to define standard interfaces for these functions so that individual programs can leverage capabilities developed to these standard interfaces across programs

that meet the standard interface specifications. Individual programs may group services and interfaces into components in different ways to serve their particular vehicle's needs. However, the entire interface defined by UMAA will be required as defined in the ICDs for all services that are included in a component. This requirement is what enables autonomy software to be ported between heterogeneous UMAA-compliant vehicles with their disparate vendor-defined vehicle control interfaces without recoding to a vehicle-specific interface.

Communications Operations defines the services required to communicate with an unmanned vehicle. Figure 2 depicts an example of potential services used in a system and their ICD mapping (designated by dashed lines).

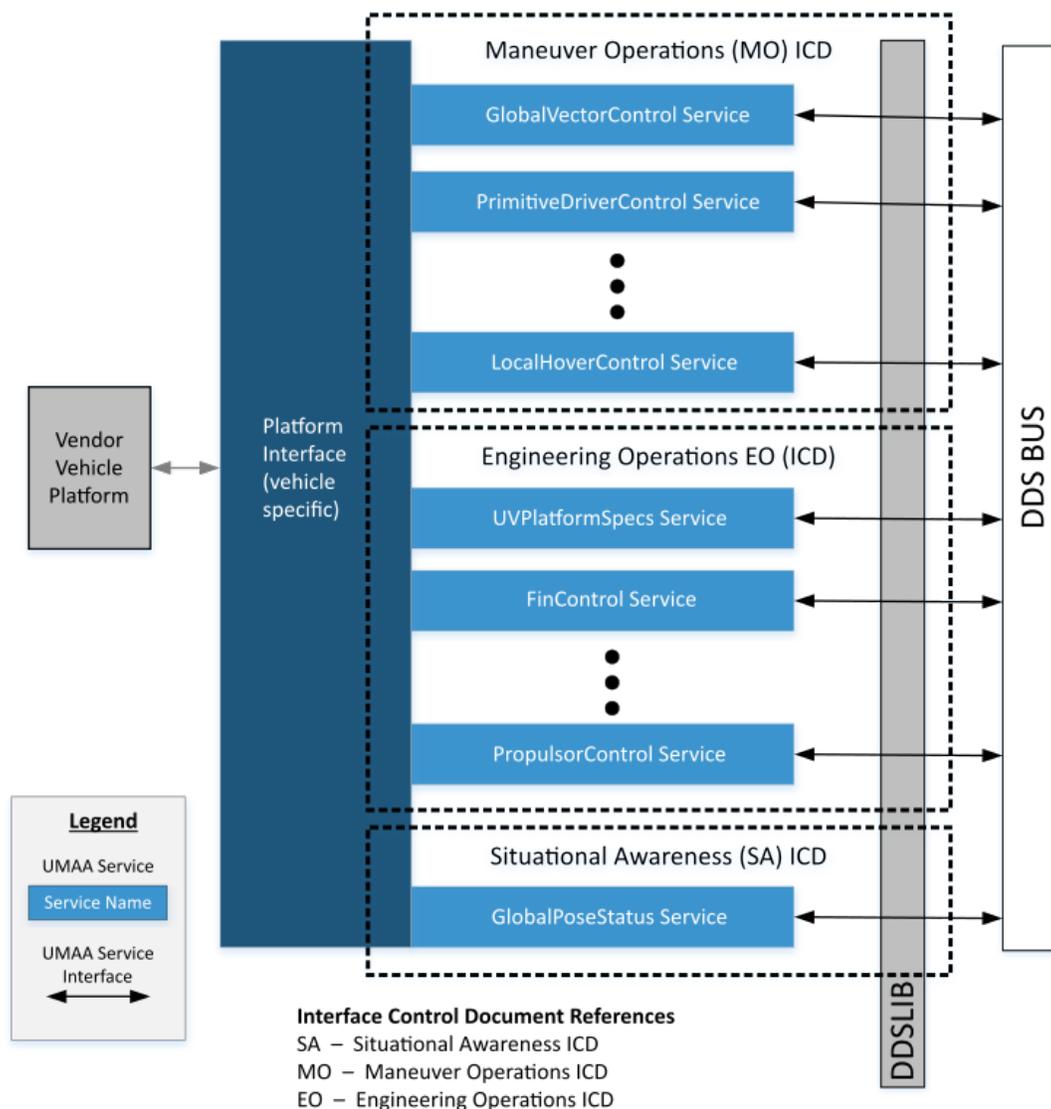


Figure 2: UMAA Services and Interfaces Example.

1.3 Document Organization

This interface control document is organized as follows:

Section 1 – Scope: A brief purview of this document

Section 2 – Referenced Documents: A listing of associated of government and non-government documents and standards

Section 3 – Introduction to Data Model, Services, and Interfaces: A description of the common data model across all services and interfaces

Section 4 – Flow Control: A description of different flow control patterns used throughout UMAA

Section 5 – Communications Operations - Experimental (CO-EXP) Services and Interfaces: A description of specific services and interfaces for this ICD

2 Referenced Documents

The documents in the following table were used in the creation of the UMAA interface design documents. Not all references may be applicable to this particular document.

Table 1: Standards Documents

Title	Release Date
A Universally Unique Identifier (UUID) URN Namespace	July 2005
Data Distribution Service for Real-Time Systems Specification, Version 1.4	March 2015
Data Distribution Service Interoperability Wire Protocol (DDSI-RTPS), Version 2.3	April 2019
Object Management Group Interface Definition Language Specification (IDL)	March 2018
Extensible and Dynamic Topic Types for DDS, Version 1.3	February 2020
UAS Control Segment (UCS) Architecture, Architecture Description, Version 2.4	27 March 2015
UCS Architecture, Conformance Specification, Version 2.2	27 September 2014
UCS-SPEC-MODEL v3.4 Enterprise Architect Model	27 March 2015
UCS Architecture, Architecture Technical Governance, Version 2.5	27 March 2015
System Modeling Language Specification, Version 1.5	May 2017
Unified Modeling Language Specification, Version 2.5.1	December 2017
Interface Definition Language (IDL), Version 4.2	March 2018
U.S. Department Of Homeland Security, United States Coast Guard "Navigation Rules International-Inland" COMDTINST M16672.2D	March 1999
IEEE 1003.1-2017 - IEEE Standard for Information Technology–Portable Operating System Interface (POSIX(R)) Base Specifications, Issue 7	December 2017
Guard, U. C. (2018). Navigation Rules and Regulations Handbook: International–Inland. Simon and Schuster.	June 2018
Department of Defense Interface Standard: Joint Military Symbology (MIL-STD-2525D Appendix A)	10 June 2014
DOD Dictionary of Military and Associated Terms	August 2018

Table 2: Government Documents

Title	Release Date
Unmanned Maritime Autonomy Architecture (UMAA) Architecture Design Description (ADD), Version 1.0	January 2019
Manual for the Submission of Oceanographic Data Collected by Unmanned Undersea Vehicles (UUVs)	October 2018

3 Introduction to Data Model, Services, and Interfaces

3.1 Data Model

A common data model is at the heart of UMAA. The common data model describes the entities that represent system state data, the attributes of those entities and relationships between those entities. This is a "data at rest" view of system-level information. It also contains data classes that define types of messages that will be produced by components, or a "data in motion" view of system-level information.

The common data model and coordinated service interfaces are described in a Unified Modeling Language (UMLTM) modeling tool and are represented as UMLTM class diagrams. Interface definition source code for messages/topics and other interface definition products and documentation will be automatically generated from the common data model so that they are consistent with the data model and to ensure that delivered software matches its interface specification.

The data model is maintained as a Multi-Domain Extension (MDE) to the UCS Architecture and will be maintained under configuration control by the UMAA Board as UCSMDE and will be incrementally integrated into the core UCS standard. Section 5 content is automatically generated from this data model, as are other automated products such as IDL that are used for automated code generation.

3.2 Definitions

UMAA ICDs follow the UCS terminology definitions found in the UCS Architecture Description v2.4. The normative (required) implementation to satisfy the requirements of a UMAA ICD is to provide service and interface specification compliance. Components may group services and required interfaces in any manner so long as every service meets its interface specifications. Figure 3 shows a particular grouping of services into components. The interfaces are represented by the blue and green lines and may equate to one or more independent input and output interfaces for each service. The implementation of the service into software components is left up to the individual system development. Given this context, section 5 correspondingly defines services with their interfaces and not components.

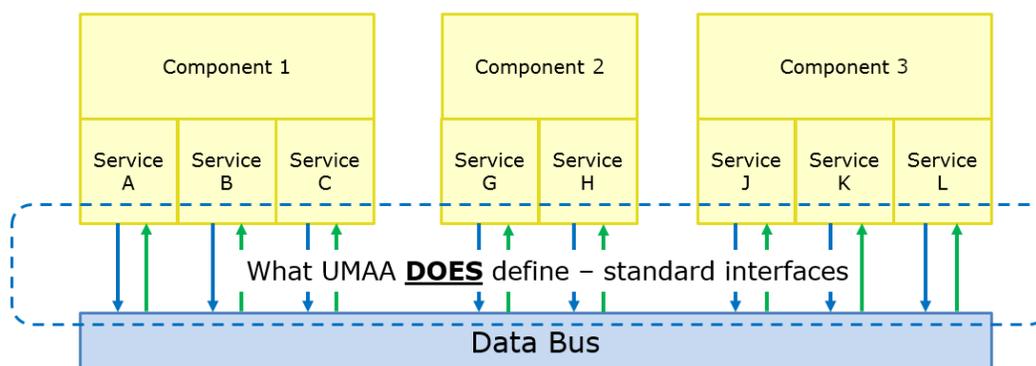


Figure 3: Services and Interfaces Exposed on the UMAA Data Bus.

Services may use other services within this ICD, or in other UMAA defined ICDs, to provide their capability. Additionally, components for acquisition and development may span multiple ICDs. An example of this would be a commercial radar that provides both status and control of the unit via the radar's software Application Programming Interface (API).

3.3 Data Distribution Service (DDSTM)

The data bus supporting autonomy messaging (as seen in Figure 3) is implemented via DDSTM. DDS is a middleware protocol and API standard for data-centric connectivity from the Object Management Group (OMG). It integrates the components of a system together, providing low-latency data connectivity, extreme reliability, and a scalable architecture. In a distributed system, middleware is the software layer that lies between the operating system and applications. It enables the various system components to more easily communicate and share data. It simplifies the development of distributed systems by letting software developers focus on the specific purpose of their applications rather than the mechanics of passing information between applications and systems. The DDS specification is fully described in free reference material on the OMG website and there are both open source and commercially available implementations.

3.4 Naming Conventions

UMAA services are modeled within the UCS Architecture under the Multi-Domain Extension (MDE). The UCS Architecture uses SoaML concepts of participant, serviceInterface, service port, and request port to describe the interfaces that make up a service and show how the service is used. Each service defines the capability it provides as well as required interfaces. Each interface consists of an operation that accepts a single message (A SoaML MessageType). In SoaML, a MessageType is defined as a unit of information exchanged between participant Request and Service ports via ServiceInterfaces. Instances of a MessageType are passed as parameters in ServiceInterface operations. (Reference: [UCS Architecture](#), [Architecture Technical Governance](#))

To promote commonality across service definitions, a common way of naming services and their sets of operations and messages has been adopted for defining services within UCS-MDE. The convention uses the Service Base Name <SBN> and an optional Function Name [FN] to derive all service names and their associated operations and messages. As this is meant to be a guide, services might not include all of the defined operations and messages and their names might not follow the convention where a more appropriate name adds clarity.

Furthermore, services in UMAA are not required to be defined as indicated in Table 3 when all parts of the service capabilities are required for the service to be meaningful (such as ResourceAllocation).

Additionally, note that for UMAA not all operations defined in UCS-MDE result in a message being published to the DDS bus, e.g., since DDS uses publish/subscribe, most query operations result in a subscription to a topic and do not actually publish the associated request message. In the case of cancel commands, there is no associated implementation of the cancel<SBN>[FN]CommandStatus as it is just the intrinsic response of the DDS dispose function; so, it is essentially a NOOP (no operation) in implementation. The conventions used to define UCS-MDE services are as follows:

Service Name

- <SBN>[FN]Config
- <SBN>[FN]Control
- <SBN>[FN]Specs
- <SBN>[FN]Status OR Report

where the SBN should be descriptive of the task or information provided by the service. Note that the FN is optional and only included if needed to clarify the function of the service. The suffixes Status and Report are interchangeable. If a "Report" is a more appropriate description of the service, it can be used in lieu of "Status".

Table 3: Service Requests and Associated Responses

	Service Requests (Inputs)	Service Responses (Outputs)
Config	set<SBN>[FN]Config query<SBN>[FN]ConfigAck query<SBN>[FN]Config cancel<SBN>[FN]Config query<SBN>[FN]ConfigExecutionStatus	report<SBN>[FN]ConfigCommandStatus report<SBN>[FN]ConfigAck report<SBN>[FN]Config report<SBN>[FN]CancelConfigCommandStatus report<SBN>[FN]ConfigExecutionStatus
Control	set<SBN>[FN] query<SBN>[FN]CommandAck cancel<SBN>[FN]Command query<SBN>[FN]ExecutionStatus	report<SBN>[FN]CommandStatus report<SBN>[FN]CommandAck report<SBN>[FN]CancelCommandStatus report<SBN>[FN]ExecutionStatus
Specs	query<SBN>[FN]Specs	report<SBN>[FN]Specs
Status OR Report	query<SBN>[FN]	report<SBN>[FN]

Service Requests (operation:message)

set<SBN>[FN]Config:<SBN>[FN]ConfigCommandType

```

query<SBN>[FN]Config:<SBN>[FN]ConfigRequestType1
set<SBN>[FN]:<SBN>[FN]CommandType
query<SBN>[FN]CommandAck:<SBN>[FN]CommandAckRequestType1
cancel<SBN>[FN]Command:<SBN>[FN]CancelCommandType1
cancel<SBN>[FN]Config:<SBN>[FN]CancelConfigType1
query<SBN>[FN]ExecutionStatus:<SBN>[FN]ExecutionStatusRequestType1
query<SBN>[FN]ConfigExecutionStatus:<SBN>[FN]ConfigExecutionStatusRequestType1
query<SBN>[FN]ConfigAck:<SBN>[FN]ConfigAckRequestType1
query<SBN>[FN]Specs:<SBN>[FN]SpecsRequestType1
query<SBN>[FN]:<SBN>[FN]RequestType1 2

```

Service Responses (operation:message)

```

report<SBN>[FN]ConfigCommandStatus:<SBN>[FN]ConfigCommandStatusType
report<SBN>[FN]Config:<SBN>[FN]ConfigReportType
report<SBN>[FN]ConfigAck:<SBN>[FN]ConfigAckReportType
report<SBN>[FN]CommandStatus:<SBN>[FN]CommandStatusType
report<SBN>[FN]CommandAck:<SBN>[FN]CommandAckReportType
report<SBN>[FN]CancelCommandStatus:<SBN>[FN]CancelCommandStatusType1
report<SBN>[FN]CancelConfigCommandStatus:<SBN>[FN]CancelConfigCommandStatusType1
report<SBN>[FN]ExecutionStatus:<SBN>[FN]ExecutionStatusReportType
report<SBN>[FN]ConfigExecutionStatus:<SBN>[FN]ConfigExecutionStatusReportType
report<SBN>[FN]Specs:<SBN>[FN]SpecsReportType
report<SBN>[FN]:<SBN>[FN]ReportType

```

where,

- Config (Configuration) Command/Report – This is the setup of a resource for operation of a particular task. Attributes may be static or variable. Examples include: maximum RPM allowed, operational sonar frequency range allowed, and maximum allowable radio transmit power.
- Command Status – This is the current state of a particular command (either control or configuration).
- Command – This is the ability to influence or direct the behavior of a resource during operation of a particular task. Attributes are variable. Examples include a vehicle's speed, engine RPM, antenna raising/lowering, and controlling a light or gong.
- Command Ack (Acknowledgement) Report – This is the command currently being executed.
- Cancel – This is the ability to cancel a particular command that has been issued.
- Execution Status Report – This is the status related to executing a particular command. Examples associated with a waypoint command include cross track error, time to achieve, and distance remaining.
- Specs (Specifications) Report – Provides a detailed description of a resource and/or its capabilities and constraints. Attributes are static. Examples include: maximum RPM of a motor, minimum frequency of a passive sonar sensor, length of the unmanned vehicle, and cycle time of a radar.
- Report – This is the current information being provided by a resource. Examples include vehicle speed, rudder angle, current waypoint, and contact bearing.

3.5 Namespace Conventions

Each UMAA service and the messages under the service can be accessed through their appropriate UMAA namespace. The namespace reflects the mapping of a specific service to its parent ICD, and the parent ICD's mapping to the overall UMAA Design Description. For example:

Access the Primitive Driver Control service under Maneuver Operations:

```
UMAA::MO::PrimitiveDriverControl
```

Access the ContactReport Service under Situational Awareness:

¹These message types are required for UCS model rules of construction, but are not implemented as messages in the UMAA specification.

²At this time, there are no Requests in the specification. This will be the message format when Requests have been added.

UMAA::SA::ContactReport

The UMAA model uses common data types that are re-used through the model to define service interface topics, interface topics, and other common data topics. These data types are not intended to be directly utilized but, for reference, they can be accessed in the same manner:

Access the common UMAA Status Message Fields:

UMAA::UMAAStatus

Access the common UMAA GeoPosition2D (i.e., latitude and longitude) structure:

UMAA::Common::Measurement::GeoPosition2D

3.6 Cybersecurity

The UMAA standard addressed in this ICD is independent from defining specific measures to achieve Cybersecurity compliance. This UMAA ICD does not preclude the incorporation of security measures, nor does it imply or guarantee any level of Cybersecurity within a system. Cybersecurity compliance will be performed on a program-specific basis and compliance testing is outside the scope of UMAA.

3.7 GUID algorithm

The UMAA standard utilizes the Globally Unique IDentifier (GUID), conforming to the variant defined in RFC 4122 (variant value of 2). Generators of GUIDs may generate GUIDs of any valid, RFC 4122-defined version that is appropriate for their specific use case and requirements. (Reference: [A Universally Unique IDentifier \(UUID\) URN Namespace](#))

3.8 Large Collections

The UMAA standard defines Large Collections, which are collections of decoupled but related data. Large Collections provide the ability to update one or more elements of the collection without republishing the entire collection to the DDS bus. This avoids two problems related to using an unbounded sequence type in a DDS message: 1) resource consumption growing as the collection is appended to or updated, and 2) DDS implementation-specific limitations on unbounded sequences. There are two implementations of a Large Collection: the Large Set (unordered) and the Large List (ordered).

In both Large Collection implementations, there are two important abstractions: the collection metadata and collection element type. Because Large Collections are specific to the UMAA PSM, the type definitions for the collection metadata and collection element are not part of MDE, and the IDL definitions of these types are generated separately. A particular UMAA message that has a Large Collection attribute will reference the metadata type (LargeSetMetadata or LargeListMetadata). The collection element type is defined under the same namespace as the message that uses it, and follows the naming pattern <parent message name><attribute name><collection type>Element. Each element of the collection is published as a separate message on the DDS bus, and can be tracked back to their related collection using the setID or listID. Users can also trace an element in a set to the source attribute (a NumericGUID) of the Service Provider that generated the report with this set using the collection metadata.

3.8.1 Necessary QoS

To achieve the Large Collection consistency in the update process described below, ordering of samples on the collection element type topic is necessary. Therefore, publishers and subscribers to the collection element type topic must use the PRESENTATION QoS policy with an access_scope of DDS_TOPIC_PRESENTATION_QOS and ordered_access.

3.8.2 Updating Large Collections

When elements of the collection are updated, the metadata must be updated as well to signal a change in the set. The updateElementID is updated to match the elementID of the element whose reception signals the end of the atomic update of the collection. Because of the requirement of an ordered topic described above, this will be the element that is updated last chronologically. The metadata updateElementTimestamp must be updated to the timestamp of the same element that signals the end of the update.

The set can be updated as a batch (multiple elements in a single "update cycle," as determined by the provider). This allows for a coarse synchronization: data elements that do not match the metadata updateElementID and updateElementTimestamp can be assumed to be part of an in-progress update cycle. Consumers can choose to immediately act on those data individually

or wait until the matching element is received to signal that the complete update cycle has finished and consider the set as a whole. Note that the coarseness of synchronization is service-dependent: in some cases an intermediate view of a collection update may be logically incorrect to act upon.

3.8.3 Specifying an Empty Large Collection

A particular Large Collection can be empty during initial creation. This is indicated by publishing metadata with a `size` of zero and an `updateElementID` set to the Nil UUID. As specified in section 4.1.7 of the referenced document "A Universally Unique Identifier (UUID) URN Namespace", this is a "special form of UUID that is specified to have all 128 bits set to zero".

3.8.4 Large Set Types

The following details the `LargeSetMetadata` structure:

Table 4: `LargeSetMetadata` Structure Definition

Attribute Name	Attribute Type	Attribute Description
<code>setID</code>	NumericGUID	Identifies the Large Set instance this metadata relates to.
<code>updateElementID</code>	NumericGUID	This field references the element ID of the set element whose reception signals the end of an atomic update to this set. This <code>updateElementID</code> must be used in conjunction with the <code>updateElementTimestamp</code> below to fully identify when the atomic update has completed and the set is stable.
<code>updateElementTimestamp†</code>	DateTime	This field identifies the <code>elementTimestamp</code> of the element, referenced above by <code>updateElementID</code> , that signals the end of an atomic update to this set. This field will be empty in the event that the element update results from a DDS dispose.
<code>size</code>	LargeCollectionSize	Indicates the number of elements associated with this set after the atomic update is complete.

An example element type is shown below, where a `FooReportType` message has a Large Set attribute called "items" whose type is `BarType`

Table 5: Example `FooReportTypeItemsSetElement` Structure Definition

Attribute Name	Attribute Type	Attribute Description
<code>element</code>	<code>BarType</code>	The value of the set element.
<code>setID</code>	NumericGUID	Identifies the Large Set instance this element relates to.
<code>elementID*</code>	NumericGUID	Uniquely identifies this element within the set and across all large collection elements that currently exist on the DDS bus.
<code>elementTimestamp</code>	DateTime	The timestamp of this element.

3.8.5 Large List Types

The following details the `LargeListMetadata` structure:

Table 6: LargeListMetadata Structure Definition

Attribute Name	Attribute Type	Attribute Description
listID	NumericGUID	Identifies the Large List instance this metadata relates to.
updateElementID	NumericGUID	This field references the element ID of the list element whose reception signals the end of an atomic update to this list. This elementID must be used in conjunction with the updateElementTimestamp below to fully identify when the atomic update has completed and the list is stable.
updateElementTimestamp†	DateTime	This field identifies the elementTimestamp of the element, referenced above by updateElementID, that signals the end of an atomic update to this list. This field will be empty in the event that the element update results from a DDS dispose.
startingElementID	NumericGUID	This field identifies the list element, tying to its elementID, that is sequentially first in the list. This is provided for convenience when iterating through the linked list using the nextElementID field.
size	LargeCollectionSize	Indicates the number of elements associated with this set after the atomic update is complete.

An example element type is shown below, where a `FooReportType` message has a Large List attribute called "items" whose type is `BarType`

Table 7: Example FooReportTypeItemsListElement Structure Definition

Attribute Name	Attribute Type	Attribute Description
element	BarType	The value of the list element.
listID	NumericGUID	Identifies the Large List instance this element relates to.
elementID*	NumericGUID	Uniquely identifies this element within the list and across all large collection elements that currently exist on the DDS bus.
elementTimestamp	DateTime	The timestamp of this element.
nextElementID†	NumericGUID	This field references to the elementID of the element that logically follows this element in the linked list. This is empty if this element is sequentially last.

4 Flow Control

4.1 Command / Response

This section defines the flow of control for command/response over the DDS bus. A command/response controls a specific service. While the exact names and processes will depend on the specific service and command being executed, all command/responses in UMAA follow a similar pattern. A notional "Function" command `FunctionCommand` is used in the following examples. As will be described in subsequent paragraphs, DDS publish/subscribe methods are used in implementations to issue commands and responses.

To direct a `FunctionCommand` at a specific Service Provider, UMAA includes a `destination` GUID in all commands. A Service Provider is required to respond to all `FunctionCommands` where the `destination` is the same as the Service Provider's ID. The Service Consumer will also create a `sessionId` for the command when commanded. The `sessionId` is used to track the command execution as a key into other command-related messages. The `sessionId` must be unique across all `FunctionCommand` instances that are active (i.e. currently on the DDS bus), otherwise the Service Provider will consider the `FunctionCommand` to be a command update (see Section 4.1.4.2). Once a `FunctionCommand` is removed from the DDS bus as part of the Command Cleanup process (see Section 4.1.5), its `sessionId` may be reused for future commands without triggering a command update; therefore it is not necessary for a Service Provider to maintain a complete history of `sessionIDs`.

Service Provider and Service Consumer terminology in the following sections is adopted from the OMG Service-oriented architecture Modeling Language (SoaML).

To initialize, a Service Provider (controllable resource) subscribes to the `FunctionCommand` DDS topic. At startup or right before issuing a command, the Service Consumer (controlling resource) subscribes to the `FunctionCommandStatus` DDS topic. Optionally, the Service Consumer may also subscribe to the `FunctionCommandAckReport` to monitor which command is currently being executed, and the `FunctionExecutionStatusReport` (if defined for the Function service) that provides reporting on function-specific data status.

Both Service Providers and Service Consumers are required to recover or clean up any previous persisted commands on the bus during initialization.

To execute a command, the Service Consumer publishes a `FunctionCommandType` to the DDS bus. The Service Provider will be notified and will begin processing the request. During each phase of processing, the Service Provider will provide updates to the Service Consumer via published updates to a related `FunctionCommandStatus` topic. Command responses are correlated to their originating command via the `sessionId`. If a command with a duplicate `sessionId` is received, the Service Provider will regard this as a command update, and follow the flow control detailed in Section 4.1.4.2. Command status updates are provided in the command responses via the `commandStatus` field with additional details included in the `commandStatusReason` field. The Service Provider will also publish the current executing command to the `FunctionCommandAckReport` topic. When defined for the Function service, the Service Provider must also publish the `FunctionExecutionStatusReport` topic and update it as appropriate throughout the execution of the command.

The required state transitions for the `commandStatus` field are shown in Figure 4. Commands may complete normally, or they may terminate early due to failure (Section 4.1.4.4) or cancellation (Section 4.1.4.5). The state machine for a command can also be reset to `ISSUED` via a command update (Section 4.1.4.2). If there is not a self-transition indicated in the diagram, you cannot republish that state in a message. Every command must transition through the states as defined. For example, it is a violation to transition from `ISSUED` to `EXECUTING` without transitioning through `COMMANDED`. Even in the case where there is no logic executing between the `ISSUED` and `EXECUTING` states, the Service Provider is required to transition through `COMMANDED`. This ensures consistent behavior across different Service Providers, including those that do require the `COMMANDED` state.

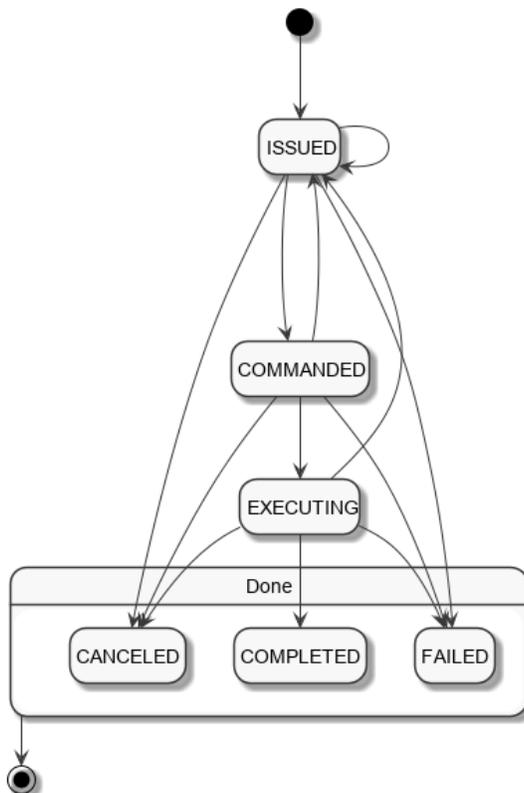


Figure 4: State transitions of the `commandStatus` as commands are processed.

As described above, each time a command transitions to a new state, a `FunctionCommandStatus` message is published containing the updated `commandStatus` and a `commandStatusReason` that indicates why the state transition happened. The table below shows all valid `commandStatusReason` values for each `commandStatus` transition.

Starting State	Ending State					
	ISSUED	COMMANDED	EXECUTING	COMPLETED	FAILED	CANCELED
Initial State	SUCCEEDED	—	—	—	—	—
ISSUED	UPDATED	SUCCEEDED	—	—	VALIDATION_FAILED RESOURCE_FAILED INTERRUPTED TIMEOUT SERVICE_FAILED	CANCELED
COMMANDED	UPDATED	—	SUCCEEDED	—	RESOURCE_REJECTED INTERRUPTED TIMEOUT SERVICE_FAILED	CANCELED
EXECUTING	UPDATED	—	—	SUCCEEDED	OBJECTIVE_FAILED RESOURCE_FAILED INTERRUPTED TIMEOUT SERVICE_FAILED	CANCELED
COMPLETED	—	—	—	—	—	—
FAILED	—	—	—	—	—	—
CANCELED	—	—	—	—	—	—

Figure 5: Valid `commandStatusReason` values for each `commandStatus` state transition. Entries marked with a (—) indicate that the state transition is invalid.

In the following sections, the sequence diagrams demonstrate different exchanges between a Service Consumer and Service

Provider. Within the diagrams, the dashed arrows represent implementation-specific communications that are outside of UMAA’s scope. These sequence diagrams are just an example of one possible implementation. Other implementations may have different communication patterns between the Service Provider and the Resource or be implemented completely within the Service Provider process itself (no dependency on an external Resource). Likewise, the interactions between the User and Service Consumer may follow similar or different patterns. However, the UMAA-defined exchanges with the DDS bus between the Service Consumer and Service Provider must happen in the order shown within the sequence diagrams.

4.1.1 High-Level Flow

The high-level flow of a command sequence is shown in Figure 6 and can be described as follows:

1. The Command Startup Sequence is performed.
2. For each command to be executed:
 - (a) The Command Start Sequence is performed.
 - (b) The command is executed (sequence depends on the execution path, i.e., success, failure, or cancel).
 - (c) The Command Cleanup Sequence is performed.
3. The Command Shutdown Sequence is performed.

The **ref** blocks will be defined in later sequence diagrams. Note that the duration of the system execution for any particular **FunctionCommandType** is defined by the combination of the Service Provider(s) and Service Consumer(s) in the system and may not be identical to the overall system execution duration. For example, providers may only be available to execute certain commands during specific mission phases or when certain hardware is in specific configurations. This Command Startup Sequence is not required to happen during a system startup phase. The only requirement is that it must be completed by at least one Service Provider and one Service Consumer before any **FunctionCommandType** commands can be fully executed. Likewise, the Command Shutdown sequence may occur at any time the **FunctionCommandType** will no longer be supported. There is no requirement stating that the Command Shutdown Sequence only be performed during a system shutdown phase.

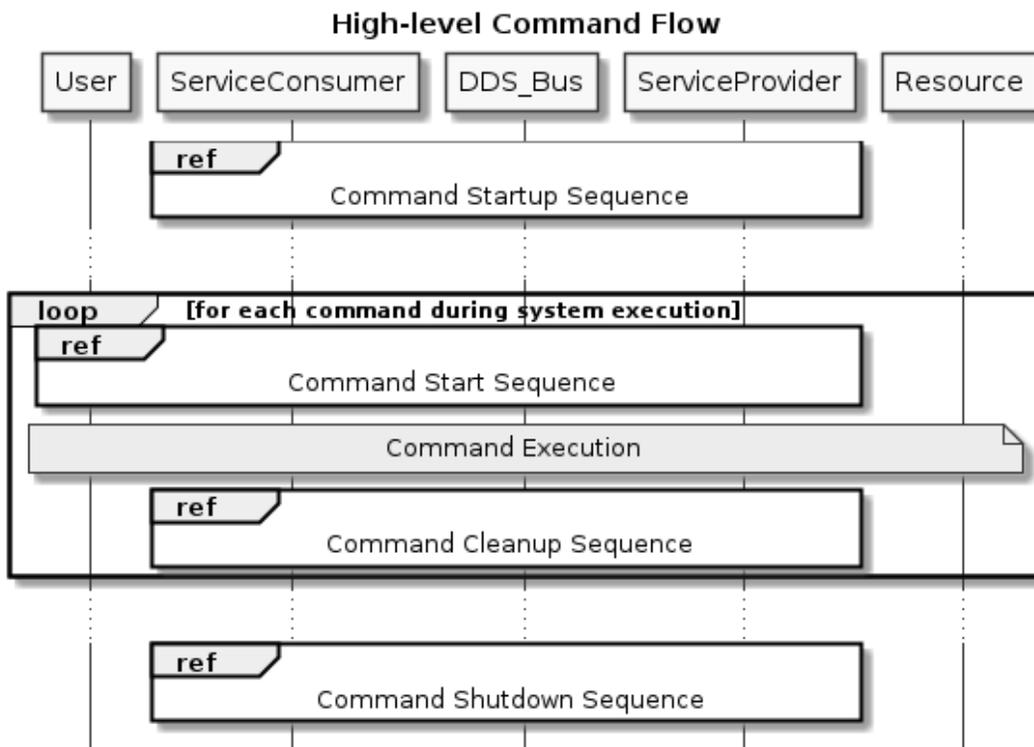


Figure 6: Sequence Diagram for the High-Level Description of a Command Execution.

4.1.2 Command Startup Sequence

As part of initialization both the Service Provider and Service Consumer are required to perform a startup sequence. This startup prepares the Service Provider to execute commands and the Service Consumer to request commands and monitor the progress of those requested commands.

The Service Provider and Service Consumer can initialize in any order. Commands will not be completely executed until both have completed their initialization. The sequence diagram is shown in Figure 7.

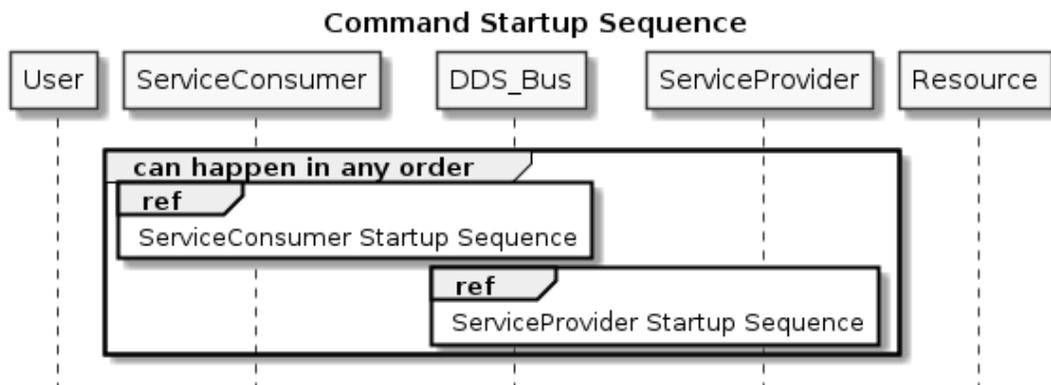


Figure 7: Sequence Diagram for Command Startup.

4.1.2.1 Service Provider Startup Sequence During startup, the Service Provider is required to register as a publisher to the `FunctionCommandStatus`, `FunctionCommandAckReport`, and (if defined for the Function service) the `FunctionExecutionStatusReport` topics.

The Service Provider is also required to subscribe to the `FunctionCommand` topic to be notified when new commands are published.

Finally, the Service Provider is required to handle any existing `FunctionCommandType` commands persisted on the DDS bus with the Service Provider’s ID. For each command, if the Service Provider can and wishes to recover, it can continue to execute the command. To obtain the last published state of the command, the Service Provider must subscribe to the `FunctionCommandStatusType`. The Service Provider will continue following the normal status update sequence, picking up from the last status on the bus. If the Service Provider cannot or chooses not to continue processing the command, it must fail the command by publishing a `FunctionCommandStatus` with a `commandStatus` of `FAILED` and a `reason` of `SERVICE_FAILED`.

The Service Provider Startup sequence is shown in Figure 8.

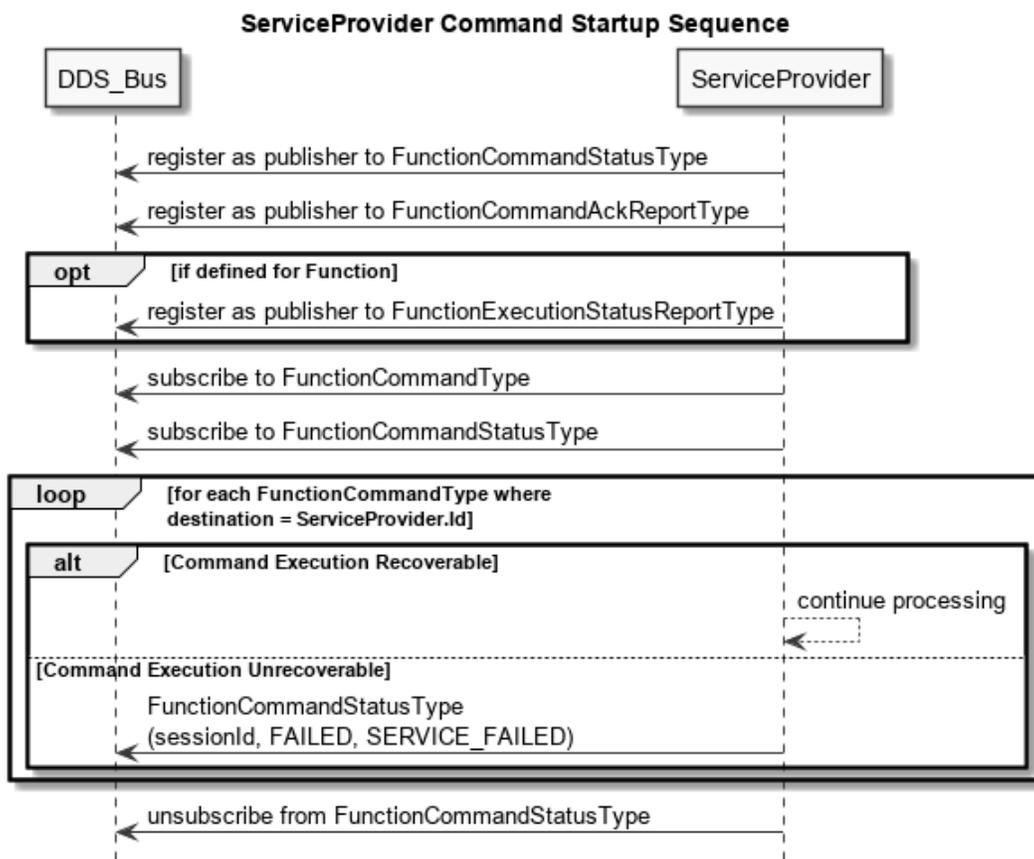


Figure 8: Sequence Diagram for Command Startup for Service Providers.

4.1.2.2 Service Consumer Startup Sequence During startup, the Service Consumer is required to register as a publisher of the `FunctionCommandType`.

The Service Consumer is also required to subscribe to the `FunctionCommandStatusType` to monitor the execution of any published commands. The Service Consumer can optionally register for the `FunctionCommandAckReportType` and, if defined for the Function service, the `FunctionExecutionStatusReportType` if it desires to track additional status of the execution of commands.

Finally, the Service Consumer is required to handle any existing `FunctionCommandType` commands persisted on the DDS bus with this Service Consumer’s ID. To find existing `FunctionCommandTypes` on the bus, it must first subscribe to the topic. If the Service Consumer can and wishes to recover, it can continue to monitor the execution of the command. If the Service Consumer cannot or chooses not to continue the execution of the command, it must cancel the command via the normal command cancel method.

The Service Consumer Startup sequence is shown in Figure 9.

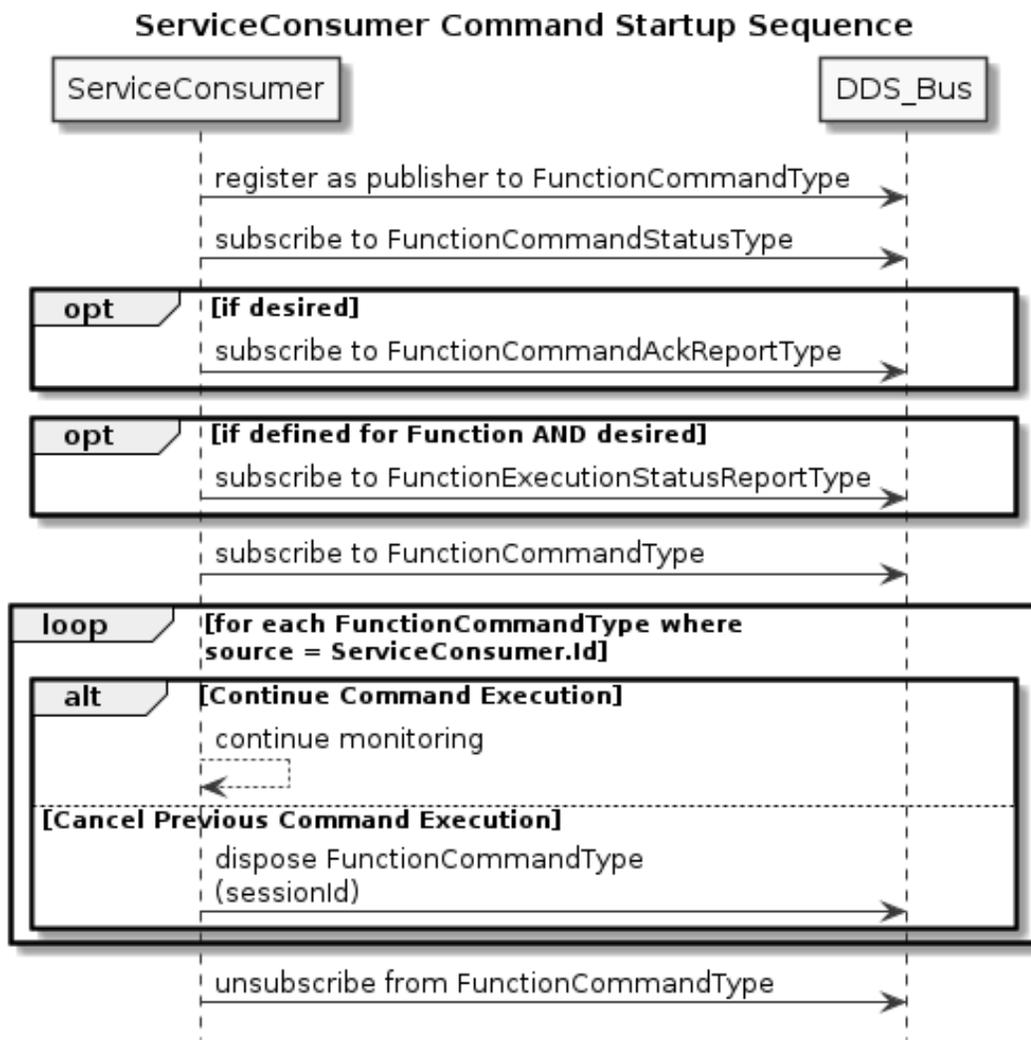


Figure 9: Sequence Diagram for Command Startup for Service Consumers.

4.1.3 Command Execution Sequences

Once both the Service Provider and Service Consumer have performed the startup sequence, the system is ready to begin issuing and executing commands.

4.1.4 Command Start Sequence

The initial start sequence to execute a single new command follows this pattern:

1. The User of the Service Consumer issues a request for a command to be executed.
2. The Service Consumer publishes the `FunctionCommandType` with a unique session ID, the source ID of the Service Consumer, and the destination ID of the desired Service Provider.
3. The Service Provider, upon notification of the new `FunctionCommandType`, publishes a new `FunctionCommandStatusType` with (1) the same session ID as the new `FunctionCommandType`, (2) the status of `ISSUED` and (3) the reason of `SUCCEEDED` to notify the Service Consumer it has received the new command.

The Command Start Sequence for a new command is shown in Figure 10. This pattern will be repeated each time a new command is requested. Note that the Command Start Sequence differs if the `FunctionCommandType` has a `sessionId` that matches another `FunctionCommandType` that currently exists on the DDS bus. This is considered a command update and detailed in Section 4.1.4.2.

After the Command Start Sequence, the sequence can take different paths depending on the actual execution of the command,

detailed from Section 4.1.4.1 to Section 4.1.4.5, but they do not enumerate all of the possible execution paths. Other paths (e.g., an objective failing) will follow a similar pattern to other failures; all are required to follow the state diagram shown in Figure 4 and eventually end with the Command Cleanup Sequence (shown in Figure 17).

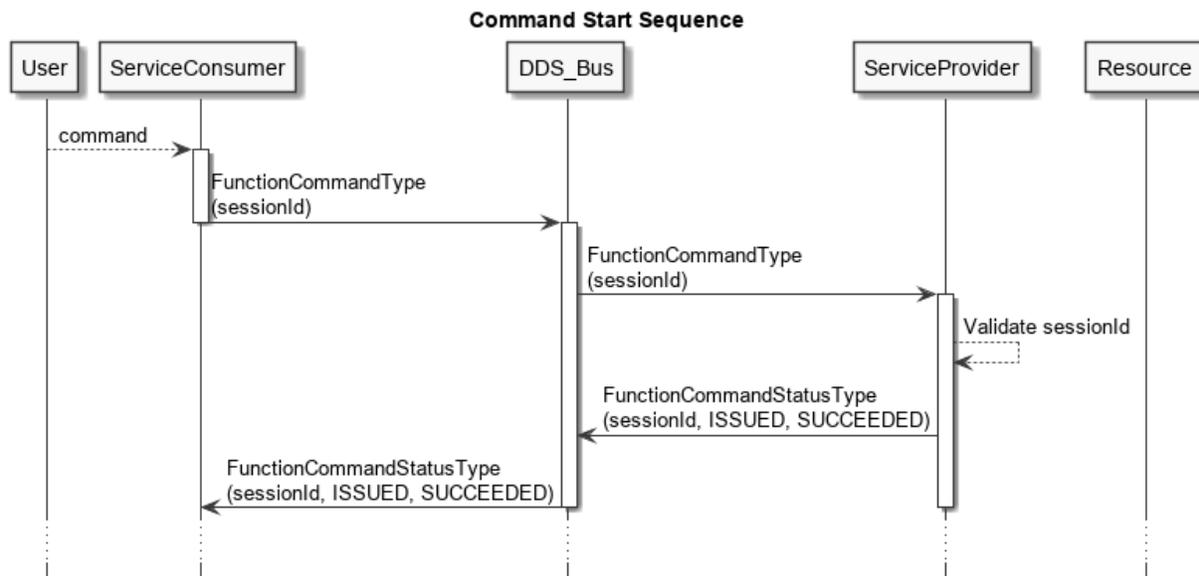


Figure 10: Sequence Diagram for the Start of a Command Execution.

4.1.4.1 Command Execution Once a Service Provider starts to process a command, the Command Execution sequence is:

1. The Service Provider publishes a **FunctionCommandAckReportType** with matching session ID and parameters as the **FunctionCommandType** it is starting to process.
2. The Service Provider performs any validation and negotiation with backing resources as necessary. Once the command is ready to be executed, the Service Provider publishes a **FunctionCommandStatusType** with a status **COMMANDED** and reason **SUCCEEDED** to notify the Service Consumer that the command has been validated and commanded to start execution.
3. Once the command has begun executing, the Service Provider publishes a **FunctionCommandStatusType** with a status **EXECUTING** and reason **SUCCEEDED** to notify the Service Consumer that the command has been validated and commanded to start.
4. If the Function has a defined **FunctionExecutionStatusReportType**, the Service Provider must publish a new instance with matching session ID as the associated **FunctionCommandType**. The **FunctionExecutionStatusReportType** must be updated by the Service Provider throughout the execution as dictated by the definitions of the command-specific attributes in the execution status report.

The command execution sequence is shown in Figure 11. This sequence holds until the command completes execution.

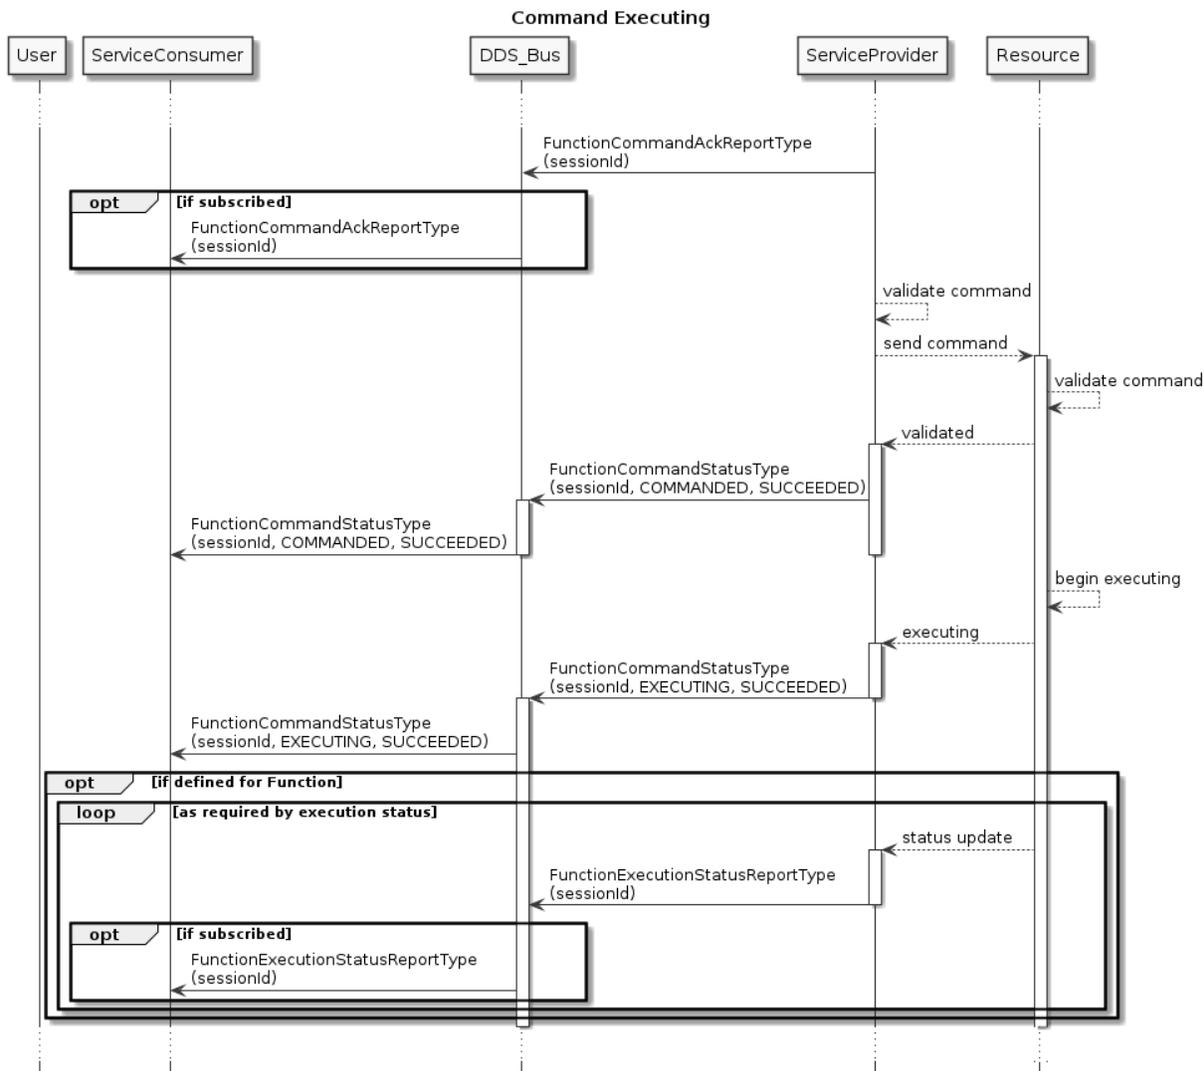


Figure 11: Beginning Sequence Diagram for a Command Execution.

The normal successful conclusion of a command being executed in some cases is initiated by the Service Consumer (an endless GlobalVector command concluded by canceling it) and in other cases is initiated by the Service Provider (a GlobalWaypoint commanded concluded by reaching the last waypoint). Unless otherwise explicitly stated, it is assumed the Service Provider will be able to identify the successful conclusion of a command. In the cases where commands are defined to be indeterminate the Service Consumer must cancel the command when the Service Consumer no longer desires the command to be executed.

4.1.4.2 Updating a Command An updated command is defined as a command with a source ID and session ID identical to the current command being processed by the Service Provider, but whose timestamp is newer than the current command. Only a command that is in a non-terminal state may be updated - otherwise, the Service Consumer must follow the normal command cleanup process and issue a new command with an updated unique session ID. When the Service Provider receives an updated command, it is required to take one of two possible actions:

1. If the current command is in a non-terminal state (ISSUED, COMMANDED, or EXECUTING), then the Service Provider publishes a **FunctionCommandStatusType** with a status **ISSUED** and reason **UPDATED**. The state machine then restarts and proceeds through the normal command flow detailed in 4.1.4. The Service Provider must consider the updated command as an entirely new command, resetting any internal state related to the command (e.g. a timer that keeps track of command timeout).
2. If the current command is in a terminal state (COMPLETED, CANCELED, or FAILED), then the updated command cannot be processed, and the Service Provider must publish a **FunctionCommandStatusType** with a status **FAILED** and follow the normal command cleanup process.

The flow control for command update is detailed below:

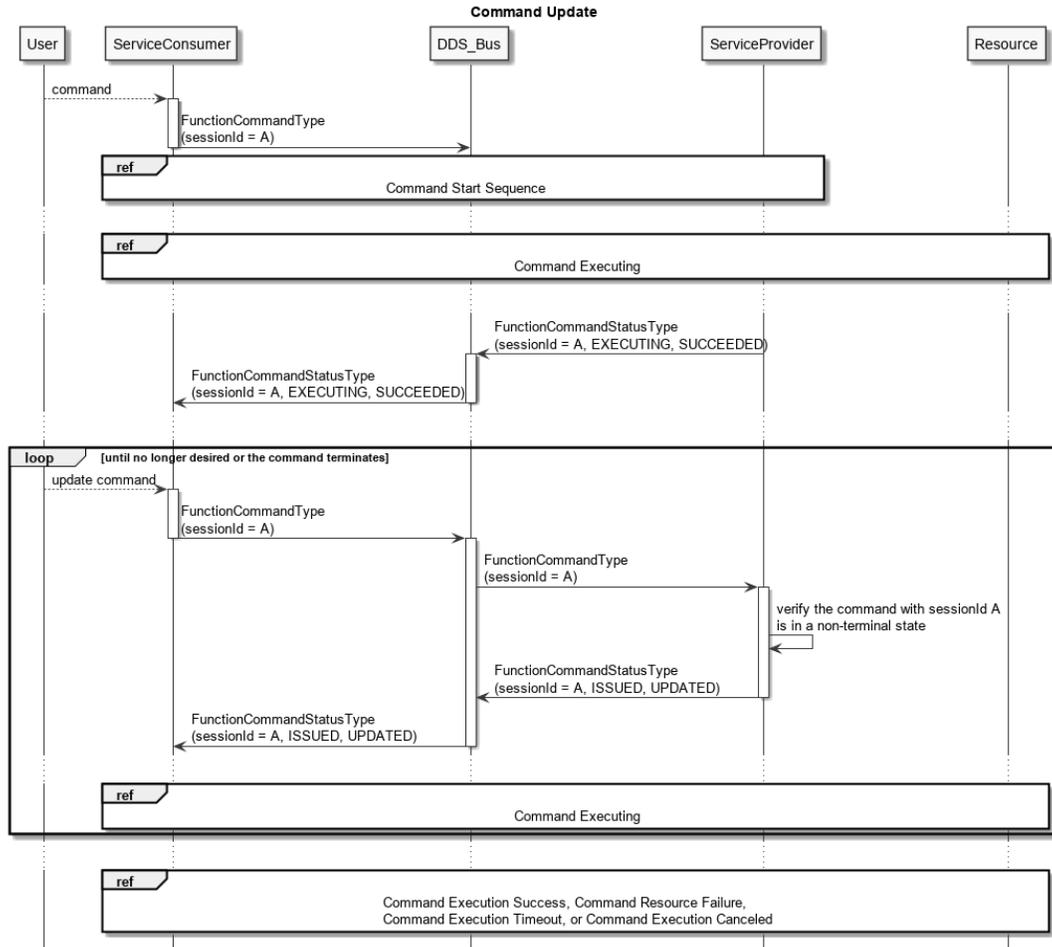


Figure 12: Sequence Diagram for Command Update.

4.1.4.3 Command Execution Success When the Service Provider determines a command has successfully completed, it must update the associated `FunctionCommandStatusType` with as status of `COMPLETED` and reason of `SUCCEEDED`. This signals to the Service Consumer that the command has completed successfully.

The Command Execution Success sequence is shown in Figure 13.

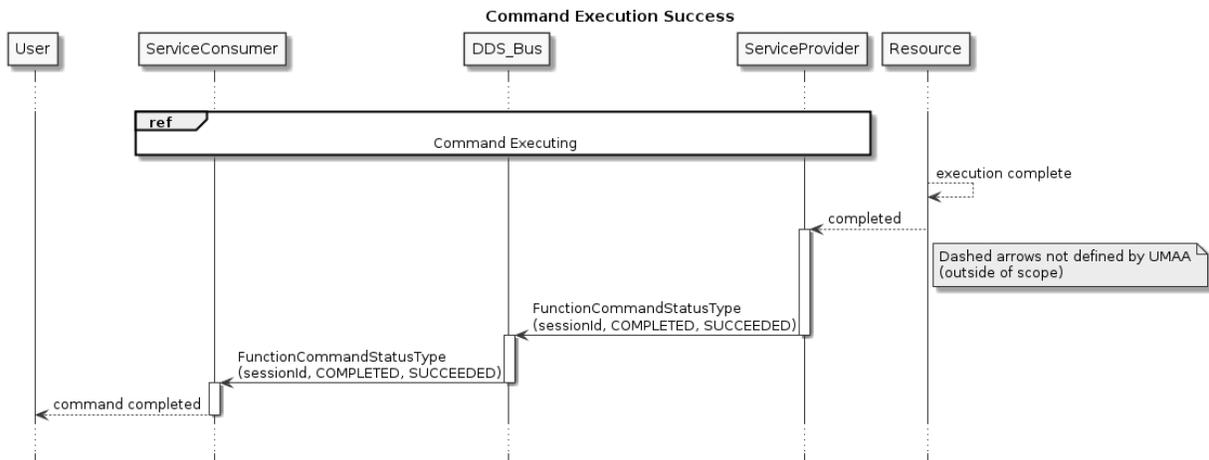


Figure 13: Sequence Diagram for a Command That Completes Successfully.

4.1.4.4 Command Execution Failure The command may fail to complete for any number of reasons including software errors, hardware failures, or unfavorable environmental conditions. The Service Provider may also reject a command for a number of reasons including inability to perform the task, malformed or out of range requests, or a command being interrupted by a higher priority process. In all cases, the Service Provider must publish a `FunctionCommandStatusType` with an identical `sessionId` as the originating `FunctionCommandType` with a status of `FAILED` and the reason that reflects the cause of the failure (`VALIDATION_FAILED`, `SERVICE_FAILED`, `OBJECTIVE_FAILED`, etc).

Figure 14 and Figure 15 provide examples where a command has failed.

In the first example, the backing Resource failed and the Service Provider is unable to communicate with it. In this case, the Service Provider will report a `FunctionCommandStatusType` with a status of `FAILED` and a reason of `RESOURCE_FAILED`. This is shown in Figure 14.

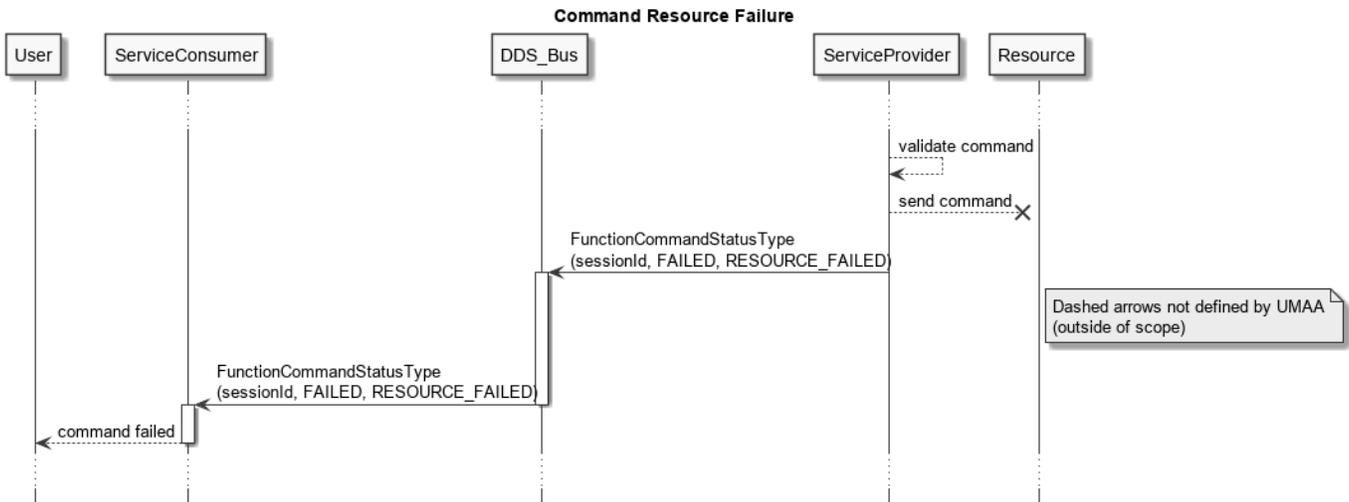


Figure 14: Sequence Diagram for a Command That Fails due to Resource Failure.

In the second example, the Resource takes too long to respond, so the Service Provider cancels the request and reports a `FunctionCommandStatusType` with a status of `FAILED` and a reason of `TIMEOUT`. This is shown in Figure 15.

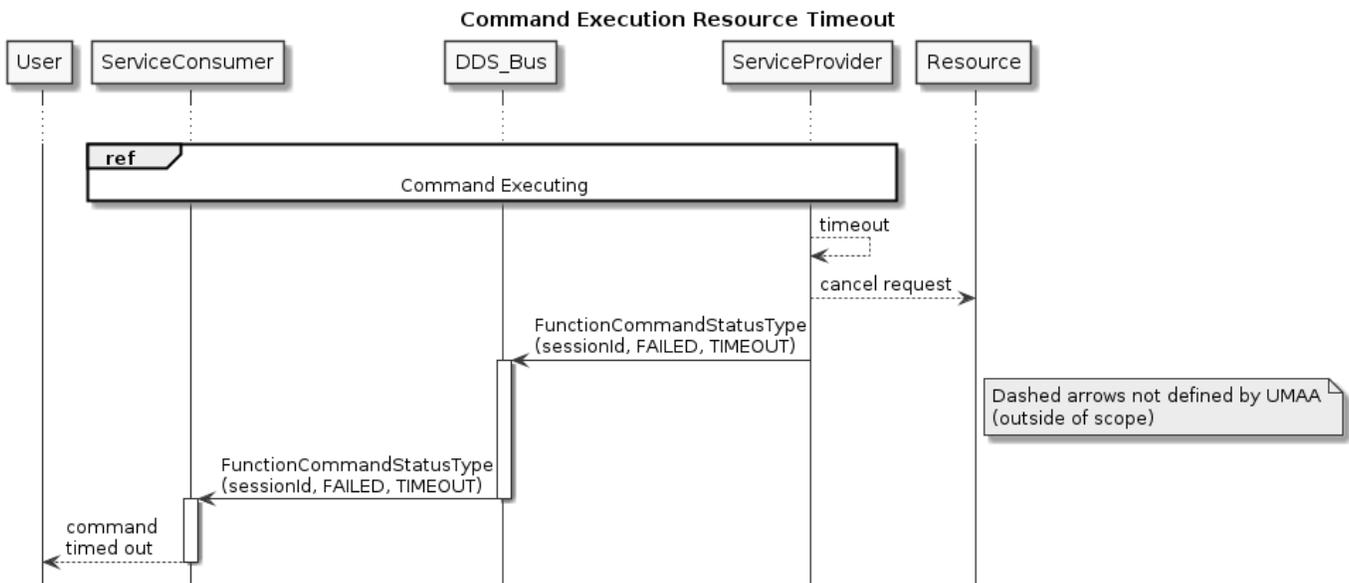


Figure 15: Sequence Diagram for a Command That Times Out Before Completing.

Other failure conditions will follow a similar pattern: when the failure is recognized, the Service Provider will publish a

FunctionCommandStatusType with a status of FAILED and a reason that reflect the cause of the failure.

4.1.4.5 Command Canceled The Service Consumer may decide to cancel the command before processing is finished. To signal a desire to cancel a command, the Service Consumer disposes of the existing FunctionCommandType from the DDS bus before the execution is complete. When notified of the command disposal, and if the Service Provider is able to cancel the command, it should respond to the Service Consumer with a FunctionCommandStatusType with both the status and reason as CANCELED. At this point, the DDS bus should dispose of the FunctionCommandStatusType, the FunctionCommandAckReportType and, (if defined for the Function service) the FunctionExecutionStatusReportType. This is shown in Figure 16. If the command cannot be canceled, then the Service Provider can continue to update the command status until the execution is completed. Reporting will include FunctionCommandStatusType with a status of COMPLETED and a reason of SUCCEEDED. Then, the DDS bus should dispose of the FunctionCommandStatusType, the FunctionCommandAckReportType, and (if defined for the Function service) the FunctionExecutionStatusReportType.

There is no new, unique, or specific status message response to a cancel command from the Service Provider. The cancel command status can be inferred through the corresponding FunctionCommandStatusType status and reason updates.

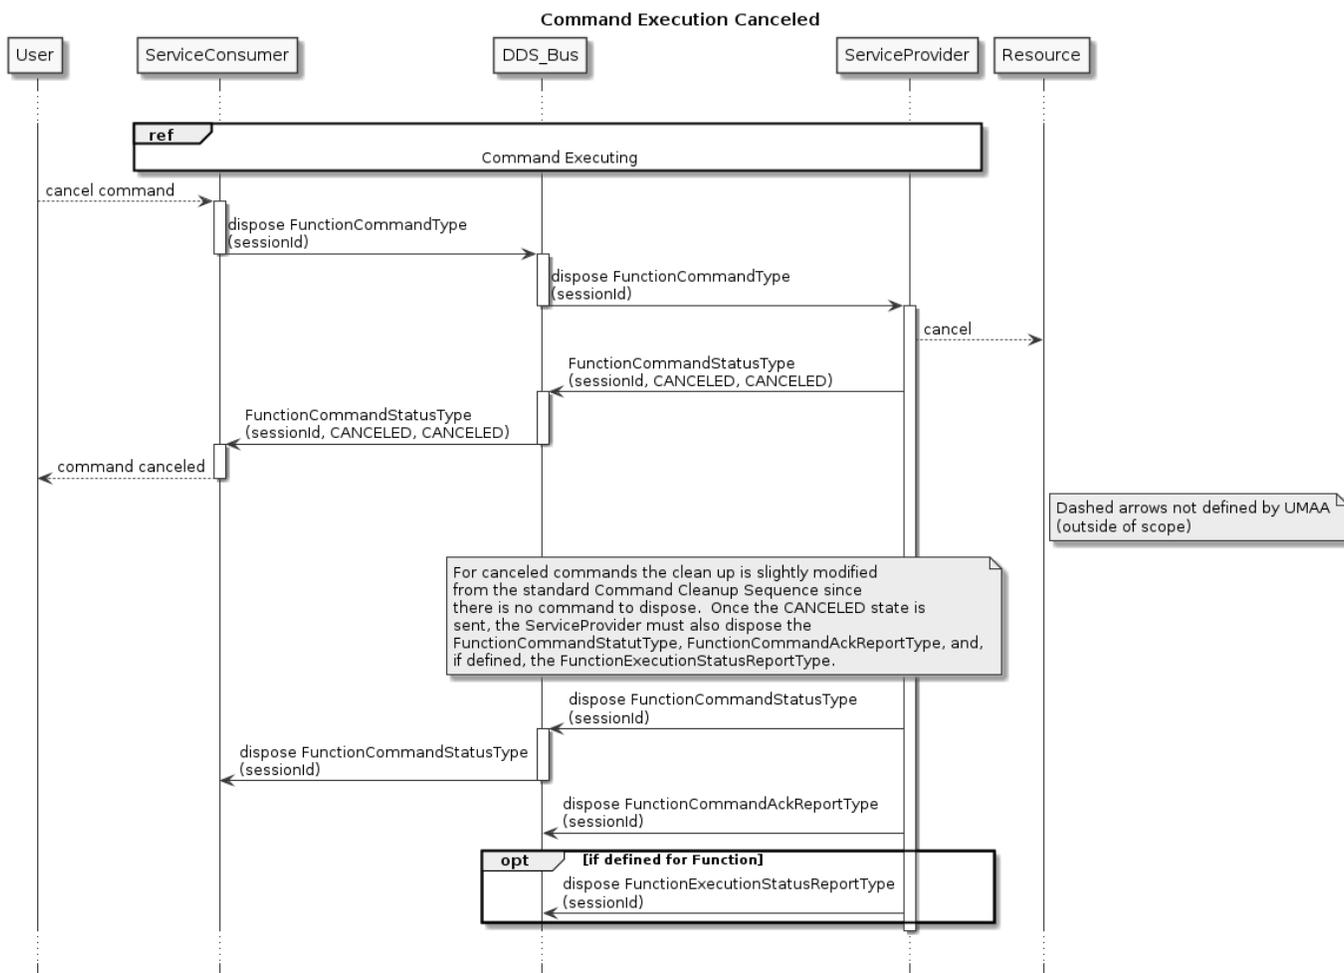


Figure 16: Sequence Diagram for a Command That is Canceled by the Service Consumer Before the Service Provider can Complete It.

4.1.5 Command Cleanup

The Service Consumer and Service Provider are responsible for disposing of corresponding data that is published to the DDS bus when the command is no longer active. With the exception of a canceled command, the signal that a FunctionCommandType can be disposed is when the FunctionCommandStatusType reports a terminal state (COMPLETED or FAILED)³. In turn, the

³While CANCELED is also a terminal state, the CANCELED command cleanup is handled specially as part of the cancelling sequence and, as such, does not need to be handled here.

signal that a `FunctionCommandStatusType`, `FunctionCommandAckReportType`, and (if defined for the Function service) the `FunctionExecutionStatusReportType` can be disposed is when the corresponding `FunctionCommandType` has been disposed. This is shown in Figure 17.

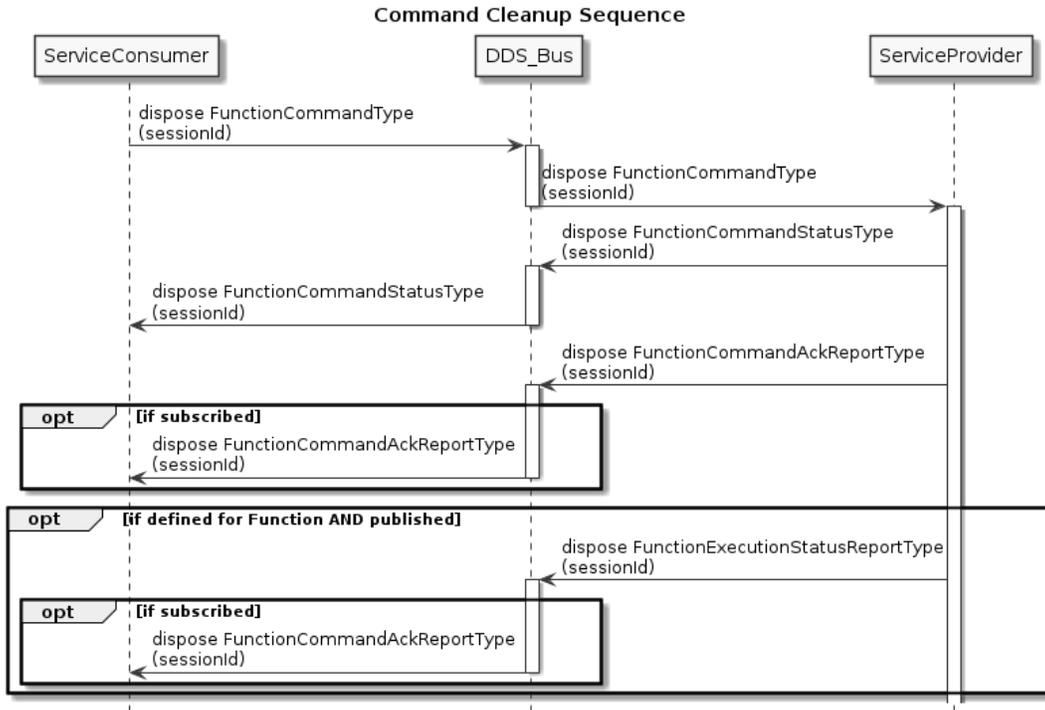


Figure 17: Sequence Diagram Showing Cleanup of the Bus When a Command Has Been Completed and the Service Consumer No Longer Wishes to Maintain the Commanded State.

4.1.6 Command Shutdown Sequence

As part of shutdown, both the Service Provider and Service Consumer are required to perform a shutdown sequence. This shutdown cleans up resources on the DDS bus and informs the system that the Service Provider and Service Consumer are no longer available.

The Service Provider and Service Consumer can shut down in any order. The sequence diagram is shown in Figure 18.

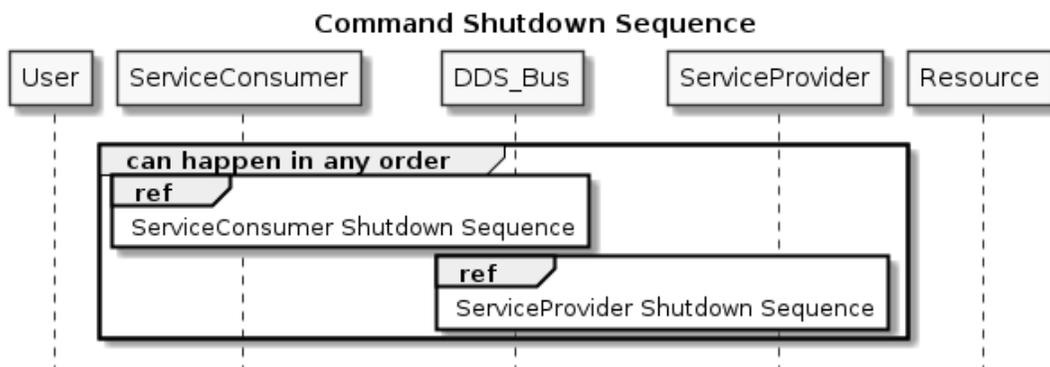


Figure 18: Sequence Diagram for Command Shutdown.

4.1.6.1 Service Provider Shutdown Sequence During shutdown, the Service Provider is required to fail any incomplete requests and then unregisters as a publisher of the `FunctionCommandStatusType`, `FunctionCommandAckReportType`, and (if defined for the Function service) the `FunctionExecutionStatusReportType`.

The Service Provider is also required to unsubscribe from the `FunctionCommandType`.

The Service Provider Shutdown sequence is shown in Figure 19.

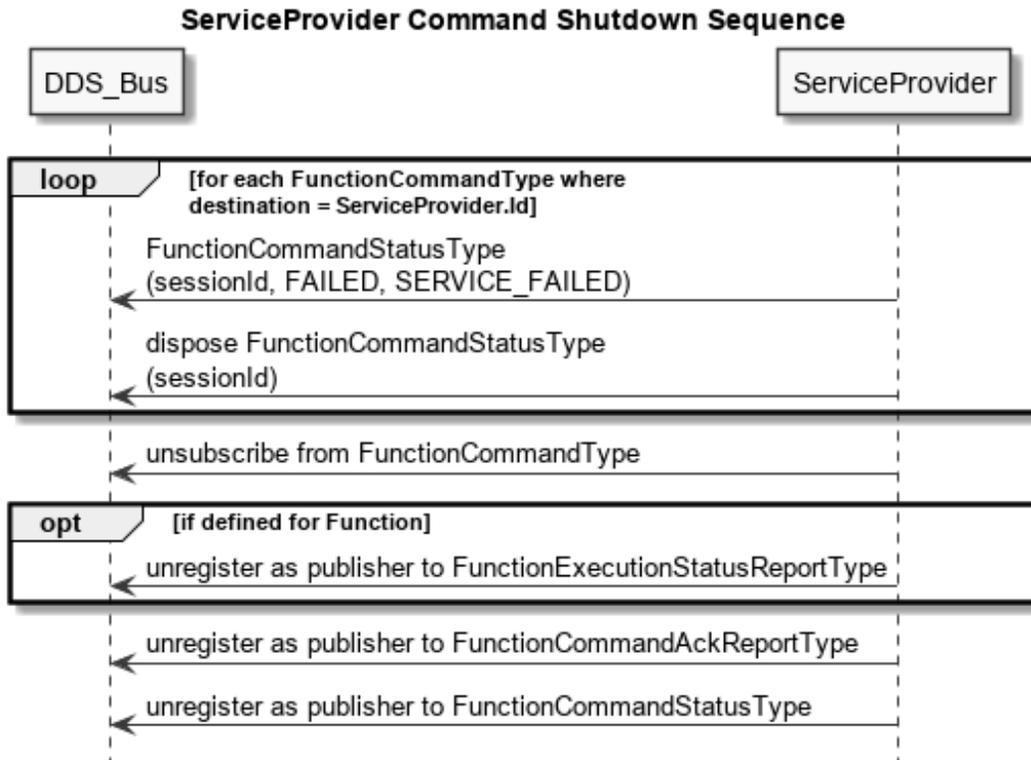


Figure 19: Sequence Diagram for Command Shutdown for Service Providers.

4.1.6.2 Service Consumer Shutdown Sequence During shutdown, the Service Consumer is required to cancel any incomplete requests and then unregister as a publisher of the `FunctionCommandType`.

The Service Consumer is also required to unsubscribe from the `FunctionCommandStatusType`, the `FunctionCommandAckReportType` if subscribed, and the `FunctionExecutionStatusReportType` if defined for the Function service and subscribed.

The Service Consumer Shutdown sequence is shown in Figure 20.

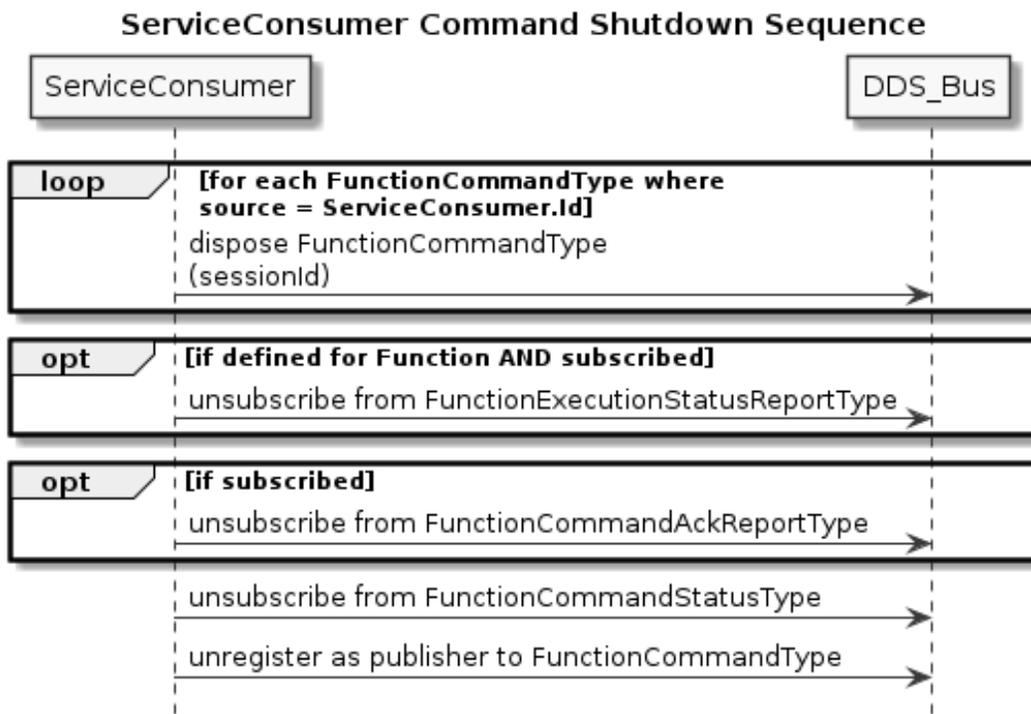


Figure 20: Sequence Diagram for Command Shutdown for Service Consumers.

4.2 Request / Reply

This section defines the flow of control for request/reply over the DDS bus. A request/reply is used to obtain data or status from a specific Service Provider.

A Service Provider is required to reply to all requests it receives. In the case of requests with no query data, this is accomplished via a DDS subscribe. In the case of a request with associated query data, a message with the query data must be published by the requester. To direct a request at a specific Service Provider or set of services, UMAA defines a **destination** GUID as part of requests.

The sequence diagrams in Sections 21 through 25 demonstrate different exchanges between a Service Consumer and Service Provider. Within the diagrams, the dashed arrows represent implementation-specific communications that are outside of UMAA’s scope. Additionally, these sequence diagrams are examples of one possible implementation. Other implementations may have different communication patterns between the Service Provider and the Resource, or be implemented completely within the Service Provider process itself (no external Resource). However, in all implementations, UMAA-defined exchanges with the DDS bus between the Service Consumer and Service Provider must happen in the order shown within the sequence diagrams.

4.2.1 Request/Reply without Query Data

Figure 21 shows the sequence of exchanges in the case where there is no specific query data (i.e., the service is always just providing the current data to the bus).

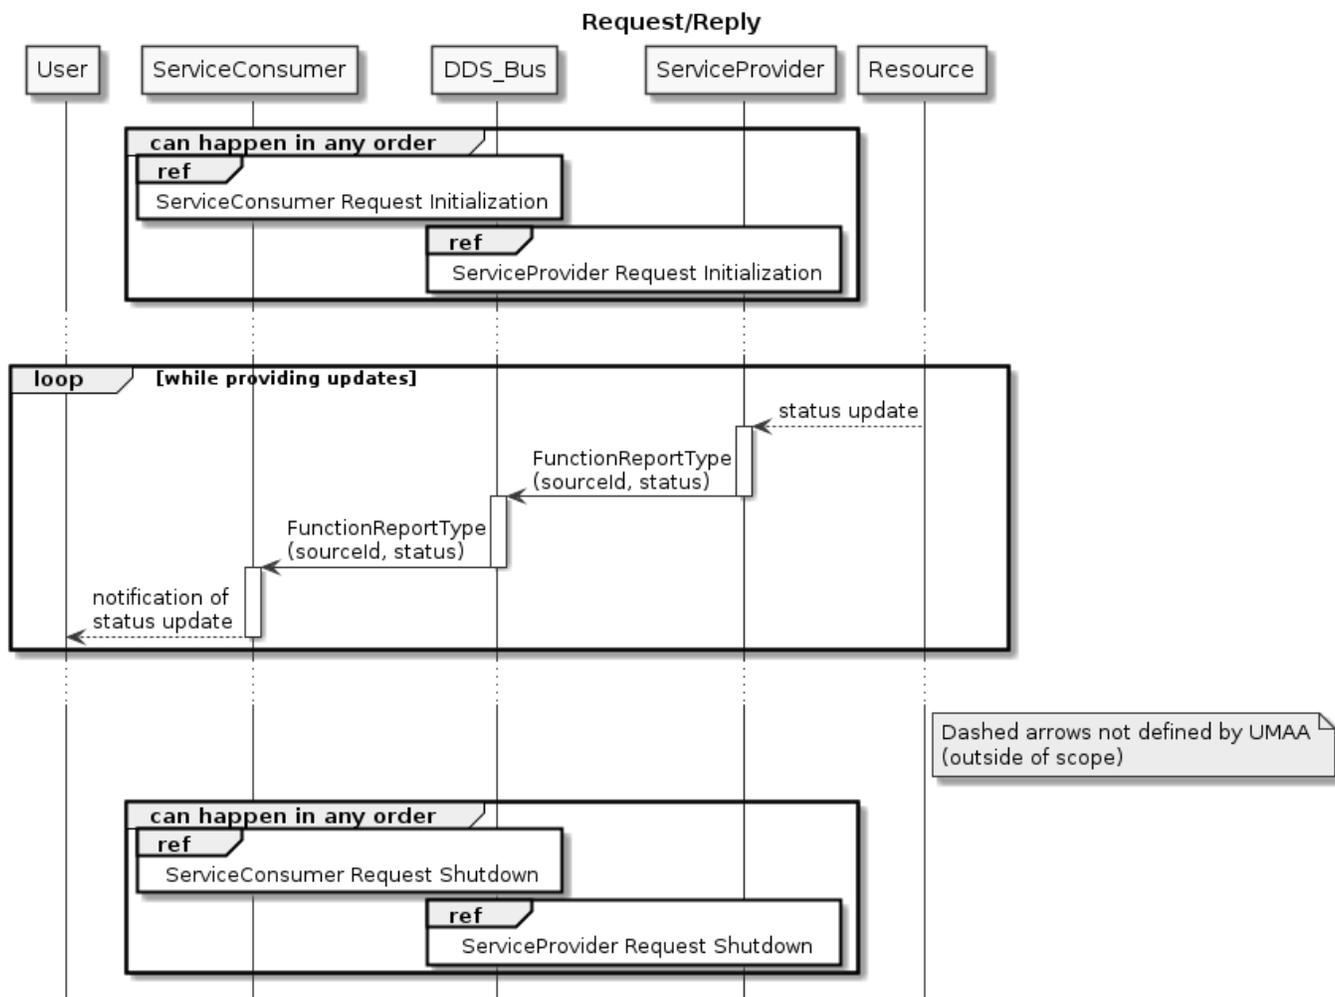


Figure 21: Sequence Diagram for a Request/Reply for Report Data That Does Not Require any Specific Query Data.

4.2.1.1 Service Provider Startup Sequence The Service Provider registers as a publisher of `FunctionReportTypes` to be able to respond to requests. The Service Provider must also handle reports that exist on the bus from a previous instantiation, either by providing an immediate update or, if the status is unrecoverable, disposing of the old `FunctionReportType`. This is shown in Figure 22.

As `FunctionReportType` updates are required (either through event-driven changes or periodic updates), the Service Provider publishes the updated data. The DDS bus will deliver the updates to the Service Consumer.

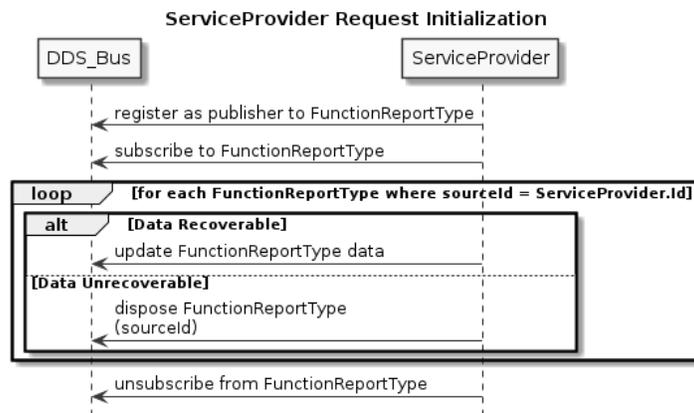


Figure 22: Sequence Diagram for Initialization of a Service Provider to Provide FunctionReportTypes.

4.2.1.2 **Service Consumer Startup Sequence** The Service Consumer subscribes to the FunctionReportType to signal an outstanding request for updates. This is shown in Figure 23.

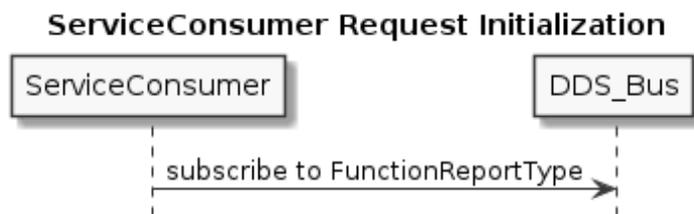


Figure 23: Sequence Diagram for Initialization of a Service Consumer to Request FunctionReportTypes.

4.2.1.3 **Service Provider Shutdown** To no longer provide FunctionReportTypes, the Service Provider disposes of the FunctionReportType and unregisters as a publisher of the data (shown in Figure 24).

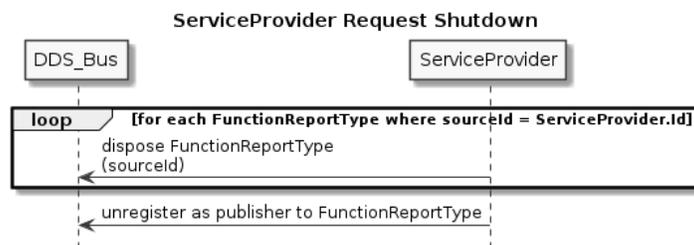


Figure 24: Sequence Diagram for Shutdown of a Service Provider.

4.2.1.4 **Service Consumer Shutdown** To no longer request FunctionReportTypes, the Service Consumer unsubscribes from FunctionReportType (shown in Figure 25).



Figure 25: Sequence Diagram for Shutdown of a Service Consumer.

4.2.2 Request/Reply with Query Data

Currently, UMAA does not define any request/reply interactions with query data, but it is expected that some will be defined. When defined, this section will be expanded to describe how they must be used.

5 Communications Operations - Experimental (CO-EXP) Services and Interfaces

5.1 Services and Interfaces

The interfaces in the following subsections describe how each UCS-UMAA topic is defined by listing the name, namespace, and member attributes. The "name" corresponds with the message name of a given service interface. The "namespace" defines the scope of the "name" where similar commands are grouped together. The "member attributes" are fields that can be populated with differing data types, e.g. a generic "depth" attribute could be populated with a double data value. Note that using a UCS-UMAA "Topic Name" requires using the fully-qualified namespace plus the topic name.

Each interface topic is referenced by a UMAA service and is defined as either an input or output interface.

Attributes ending in one or more asterisk(s) denote the following:

* = Key (annotated with @key in IDL file; vendors may use different notation to indicate a key field)

† = Optional (annotated with @optional in IDL file; vendors may use different notation to indicate an optional field)

Optional fields should be handled as described in the UMAA Compliance Specification.

Commands issued on the DDS bus must be treated as if they are immutable in UMAA and, therefore, if updated (treated incorrectly as mutable), the resulting service actions are indeterminate and flow control protocols are no longer guaranteed.

Operations without DDS Topics

The following operations are all handled directly by DDS. They are marked in the operations tables with a \oplus .

query<...> - All query operations are used to retrieve the correlated report message. For UMAA, this operation is accomplished through subscribing to the appropriate DDS topic.

cancel<...> - All cancel operations are used to nullify the current command. For UMAA, this operation is accomplished through the DDS dispose action on the publisher.

report<...>CancelCommandStatus - All cancel reports are included here to show completeness of the MDE model mapping to UMAA. For UMAA, this operation is not used. Instead, the cancel status is inferred from the associated command status. If the cancel command is successful, the corresponding command will fail with a command status and reason of CANCELED. If the corresponding command status reports COMPLETED, then this cancel command has failed.

5.1.1 CommsChannelConfig

The purpose of this service is to give status info for both sender and receiver side of a comms device. For the sending side it gives info on the messages being buffered to be sent and sender statistics related to send history. For the receiver side, it gives last message received info and statistics on the data coming through the link. It also reports other comms system status of interest.

Table 8: CommsChannelConfig Operations

Service Requests (Inputs)	Service Responses (Outputs)
setCommsChannelAddMessageConfig	reportCommsChannelAddMessageConfigCommandStatus
cancelCommsChannelAddMessageConfig \oplus	reportCommsChannelAddMessageCancelConfigCommandStatus \oplus
queryCommsChannelAddMessageConfigAck \oplus	reportCommsChannelAddMessageConfigAck
setCommsChannelDeleteMessageConfig	reportCommsChannelDeleteMessageConfigCommandStatus
cancelCommsChannelDeleteMessageConfig \oplus	reportCommsChannelDeleteMessageCancelConfigCommandStatus \oplus
queryCommsChannelDeleteMessageConfigAck \oplus	reportCommsChannelDeleteMessageConfigAck
queryCommsChannelConfig \oplus	reportCommsChannelConfig

See [Section 5.1](#) for an explanation of the inputs and outputs marked with a \oplus .

5.1.1.1 reportCommsChannelAddMessageConfigAck

Description: This operation is used to report the current CommsChannelAddMessage configuration.

Namespace: UMAA::CO::CommsChannelConfig

Topic: CommsChannelAddMessageConfigAckReport

Data Type: CommsChannelAddMessageConfigAckReportType

Table 9: CommsChannelAddMessageConfigAckReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASStatus		
config	CommsChannelAddMessageConfigCommandType	The source configuration.

5.1.1.2 reportCommsChannelAddMessageConfigCommandStatus

Description: This operation is used to provide the status of the current CommsChannelAddMessageConfig command.

Namespace: UMAA::CO::CommsChannelConfig

Topic: CommsChannelAddMessageConfigCommandStatus

Data Type: CommsChannelAddMessageConfigCommandStatusType

Table 10: CommsChannelAddMessageConfigCommandStatusType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACCommandStatus		

5.1.1.3 reportCommsChannelConfig

Description: This operation is used to report the current status of the CommsChannelConfig service.

Namespace: UMAA::CO::CommsChannelConfig

Topic: CommsChannelConfigReport

Data Type: CommsChannelConfigReportType

Table 11: CommsChannelConfigReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAAStatus		
messageConfigs	sequence< CommsChannelMessageConfigType >	The message configurations in the system.

5.1.1.4 reportCommsChannelDeleteMessageConfigAck

Description: This operation is used to report the current CommsChannelDeleteMessage configuration.

Namespace: UMAA::CO::CommsChannelConfig

Topic: CommsChannelDeleteMessageConfigAckReport

Data Type: CommsChannelDeleteMessageConfigAckReportType

Table 12: CommsChannelDeleteMessageConfigAckReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAAStatus		
config	CommsChannelDeleteMessageConfigCommandType	The source configuration.

5.1.1.5 reportCommsChannelDeleteMessageConfigCommandStatus

Description: This operation is used to provide the status of the current CommsChannelDeleteMessageConfig command.

Namespace: UMAA::CO::CommsChannelConfig

Topic: CommsChannelDeleteMessageConfigCommandStatus

Data Type: CommsChannelDeleteMessageConfigCommandStatusType

Table 13: CommsChannelDeleteMessageConfigCommandStatusType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACCommandStatus		

5.1.1.6 setCommsChannelAddMessageConfig

Description: This operation is used to add a new message configuration.

Namespace: UMAA::CO::CommsChannelConfig

Topic: CommsChannelAddMessageConfigCommand

Data Type: CommsChannelAddMessageConfigCommandType

Table 14: CommsChannelAddMessageConfigCommandType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommand		
messageConfig	CommsChannelMessageConfigType	Specifies the message configuration to be added.

5.1.1.7 setCommsChannelDeleteMessageConfig

Description: This operation is used to add a new message configuration.

Namespace: UMAA::CO::CommsChannelConfig

Topic: CommsChannelDeleteMessageConfigCommand

Data Type: CommsChannelDeleteMessageConfigCommandType

Table 15: CommsChannelDeleteMessageConfigCommandType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommand		
messageType	StringShortDescription	The message type.
messageConfigID*	NumericGUID	The identifier of the message config to delete.

5.1.2 CommsChannelControl

The purpose of this service is to provide the operations needed for an unmanned vehicle to control the comms channel.

Table 16: CommsChannelControl Operations

Service Requests (Inputs)	Service Responses (Outputs)
setCommsChannelClearAll	reportCommsChannelClearAllCommandStatus
queryCommsChannelClearAllCommandAck ⊕	reportCommsChannelClearAllCommandAck
cancelCommsChannelClearAllCommand ⊕	reportCommsChannelClearAllCancelCommandStatus ⊕
setCommsChannelClearMessage	reportCommsChannelClearMessageCommandStatus
queryCommsChannelClearMessageCommandAck ⊕	reportCommsChannelClearMessageCommandAck
cancelCommsChannelClearMessageCommand ⊕	reportCommsChannelClearMessageCancelCommandStatus ⊕

Service Requests (Inputs)	Service Responses (Outputs)
setCommsChannelReset	reportCommsChannelResetCommandStatus
queryCommsChannelResetCommandAck⊕	reportCommsChannelResetCommandAck
cancelCommsChannelResetCommand⊕	reportCommsChannelResetCancelCommandStatus⊕
setCommsChannelShutdown	reportCommsChannelShutdownCommandStatus
queryCommsChannelShutdownCommandAck⊕	reportCommsChannelShutdownCommandAck
cancelCommsChannelShutdownCommand⊕	reportCommsChannelShutdownCancelCommandStatus⊕
setCommsChannelStartup	reportCommsChannelStartupCommandStatus
queryCommsChannelStartupCommandAck⊕	reportCommsChannelStartupCommandAck
cancelCommsChannelStartupCommand⊕	reportCommsChannelStartupCancelCommandStatus⊕

See Section 5.1 for an explanation of the inputs and outputs marked with a ⊕.

5.1.2.1 reportCommsChannelClearAllCommandAck

Description: This operation is used to provide the CommsChannelClearAll commanded values.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelClearAllCommandAckReport

Data Type: CommsChannelClearAllCommandAckReportType

Table 17: CommsChannelClearAllCommandAckReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatusBase		
command	CommsChannelClearAllCommandType	The source command.

5.1.2.2 reportCommsChannelClearAllCommandStatus

Description: This operation is used to report the status of the current CommsChannelClearAll command.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelClearAllCommandStatus

Data Type: CommsChannelClearAllCommandStatusType

Table 18: CommsChannelClearAllCommandStatusType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatus		

5.1.2.3 reportCommsChannelClearMessageCommandAck

Description: This operation is used to provide the CommsChannelClearMessage commanded values.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelClearMessageCommandAckReport

Data Type: CommsChannelClearMessageCommandAckReportType

Table 19: CommsChannelClearMessageCommandAckReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatusBase		
command	CommsChannelClearMessageCommandType	The source command.

5.1.2.4 reportCommsChannelClearMessageCommandStatus

Description: This operation is used to report the status of the current CommsChannelClearMessage command.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelClearMessageCommandStatus

Data Type: CommsChannelClearMessageCommandStatusType

Table 20: CommsChannelClearMessageCommandStatusType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatus		

5.1.2.5 reportCommsChannelResetCommandAck

Description: This operation is used to provide the CommsChannelReset commanded values.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelResetCommandAckReport

Data Type: CommsChannelResetCommandAckReportType

Table 21: CommsChannelResetCommandAckReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatusBase		
command	CommsChannelResetCommandType	The source command.

5.1.2.6 reportCommsChannelResetCommandStatus

Description: This operation is used to report the status of the current CommsChannelReset command.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelResetCommandStatus

Data Type: CommsChannelResetCommandStatusType

Table 22: CommsChannelResetCommandStatusType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatus		

5.1.2.7 reportCommsChannelShutdownCommandAck

Description: This operation is used to provide the CommsChannelShutdown commanded values.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelShutdownCommandAckReport

Data Type: CommsChannelShutdownCommandAckReportType

Table 23: CommsChannelShutdownCommandAckReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatusBase		
command	CommsChannelShutdownCommandType	The source command.

5.1.2.8 reportCommsChannelShutdownCommandStatus

Description: This operation is used to report the status of the current CommsChannelShutdown command.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelShutdownCommandStatus

Data Type: CommsChannelShutdownCommandStatusType

Table 24: CommsChannelShutdownCommandStatusType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatus		

5.1.2.9 reportCommsChannelStartupCommandAck

Description: This operation is used to provide the CommsChannelStartup commanded values.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelStartupCommandAckReport

Data Type: CommsChannelStartupCommandAckReportType

Table 25: CommsChannelStartupCommandAckReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatusBase		
command	CommsChannelStartupCommandType	The source command.

5.1.2.10 reportCommsChannelStartupCommandStatus

Description: This operation is used to report the status of the current CommsChannelStartup command.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelStartupCommandStatus

Data Type: CommsChannelStartupCommandStatusType

Table 26: CommsChannelStartupCommandStatusType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatus		

5.1.2.11 setCommsChannelClearAll

Description: This operation is used to set the CommsChannelClearAll command.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelClearAllCommand

Data Type: CommsChannelClearAllCommandType

Table 27: CommsChannelClearAllCommandType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommand		

5.1.2.12 setCommsChannelClearMessage

Description: This operation is used to set the CommsChannelClearMessage command.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelClearMessageCommand

Data Type: CommsChannelClearMessageCommandType

Table 28: CommsChannelClearMessageCommandType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommand		
messageType	StringShortDescription	Clear all messages of this type that are queued for send.

5.1.2.13 setCommsChannelReset

Description: This operation is used to set the CommsChannelReset command.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelResetCommand

Data Type: CommsChannelResetCommandType

Table 29: CommsChannelResetCommandType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACCommand		

5.1.2.14 setCommsChannelShutdown

Description: This operation is used to set the CommsChannelShutdown command.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelShutdownCommand

Data Type: CommsChannelShutdownCommandType

Table 30: CommsChannelShutdownCommandType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACCommand		

5.1.2.15 setCommsChannelStartup

Description: This operation is used to set the CommsChannelStartup command.

Namespace: UMAA::CO::CommsChannelControl

Topic: CommsChannelStartupCommand

Data Type: CommsChannelStartupCommandType

Table 31: CommsChannelStartupCommandType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACCommand		

5.1.3 CommsChannelDataEncodingReport

The purpose of this service is to provide the current data encoding rate of the comms channel.

Table 32: CommsChannelDataEncodingReport Operations

Service Requests (Inputs)	Service Responses (Outputs)
queryCommsChannelDataEncoding ⊕	reportCommsChannelDataEncoding

See [Section 5.1](#) for an explanation of the inputs and outputs marked with a \oplus .

5.1.3.1 reportCommsChannelDataEncoding

Description: This operation is used to report the current status of the CommsChannelDataEncoding service.

Namespace: UMAA::CO::CommsChannelDataEncodingReport

Topic: CommsChannelDataEncodingReport

Data Type: CommsChannelDataEncodingReportType

Table 33: CommsChannelDataEncodingReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASatus		
throughput	DataTransferRate	The effective transmission rate of data over the comms channel.

5.1.4 CommsChannelEnvironmentReport

The purpose of this service is to provide the current environmental status of the comms channel.

Table 34: CommsChannelEnvironmentReport Operations

Service Requests (Inputs)	Service Responses (Outputs)
queryCommsChannelEnvironment\oplus	reportCommsChannelEnvironment

See [Section 5.1](#) for an explanation of the inputs and outputs marked with a \oplus .

5.1.4.1 reportCommsChannelEnvironment

Description: This operation is used to report the current status of the CommsChannelEnvironment service.

Namespace: UMAA::CO::CommsChannelEnvironmentReport

Topic: CommsChannelEnvironmentReport

Data Type: CommsChannelEnvironmentReportType

Table 35: CommsChannelEnvironmentReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASatus		
mostRecentSNR	SignalToNoiseRatio	The signal to noise ratio.

5.1.5 CommsChannelPowerConfig

The purpose of this service is to define the parameters needed for an unmanned vehicle to configure the power configuration for the comms channel.

Table 36: CommsChannelPowerConfig Operations

Service Requests (Inputs)	Service Responses (Outputs)
setCommsChannelPowerConfig	reportCommsChannelPowerConfigCommandStatus
cancelCommsChannelPowerConfig \oplus	reportCommsChannelPowerCancelConfigCommandStatus \oplus
queryCommsChannelPowerConfig \oplus	reportCommsChannelPowerConfig
queryCommsChannelPowerConfigAck \oplus	reportCommsChannelPowerConfigAck

See [Section 5.1](#) for an explanation of the inputs and outputs marked with a \oplus .

5.1.5.1 reportCommsChannelPowerConfig

Description: This operation is used to report the current status of the CommsChannelPowerConfig service.

Namespace: UMAA::CO::CommsChannelPowerConfig

Topic: CommsChannelPowerConfigReport

Data Type: CommsChannelPowerConfigReportType

Table 37: CommsChannelPowerConfigReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASatus		
maxTransmitPowerUsage	ElectricalPower	The maximum amount of power allowed to transmit messages.

5.1.5.2 reportCommsChannelPowerConfigAck

Description: This operation is used to report the current CommsChannelPower configuration.

Namespace: UMAA::CO::CommsChannelPowerConfig

Topic: CommsChannelPowerConfigAckReport

Data Type: CommsChannelPowerConfigAckReportType

Table 38: CommsChannelPowerConfigAckReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASStatus		
config	CommsChannelPowerConfigCommandType	The source configuration.

5.1.5.3 reportCommsChannelPowerConfigCommandStatus

Description: This operation is used to report the status of the current CommsChannelPowerConfig command.

Namespace: UMAA::CO::CommsChannelPowerConfig

Topic: CommsChannelPowerConfigCommandStatus

Data Type: CommsChannelPowerConfigCommandStatusType

Table 39: CommsChannelPowerConfigCommandStatusType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACCommandStatus		

5.1.5.4 setCommsChannelPowerConfig

Description: This operation is used to set the CommsChannelPowerConfig command.

Namespace: UMAA::CO::CommsChannelPowerConfig

Topic: CommsChannelPowerConfigCommand

Data Type: CommsChannelPowerConfigCommandType

Table 40: CommsChannelPowerConfigCommandType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACCommand		
maxTransmitPowerUsage	ElectricalPower	The maximum amount of power allowed to transmit messages.

5.1.6 CommsChannelPowerReport

The purpose of this service is to provide the current power utilization of the comms channel.

Table 41: CommsChannelPowerReport Operations

Service Requests (Inputs)	Service Responses (Outputs)
queryCommsChannelPower ⊕	reportCommsChannelPower

See [Section 5.1](#) for an explanation of the inputs and outputs marked with a ⊕.

5.1.6.1 reportCommsChannelPower

Description: This operation is used to report the current status of the CommsChannelPower service.

Namespace: UMAA::CO::CommsChannelPowerReport

Topic: CommsChannelPowerReport

Data Type: CommsChannelPowerReportType

Table 42: CommsChannelPowerReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASatus		
mostRecentPowerUsage	ElectricalPower	The amount of power required to transmit previous message successfully.

5.1.7 CommsChannelSpecs

The purpose of this service is to provide various static information related to the comms channel.

Table 43: CommsChannelSpecs Operations

Service Requests (Inputs)	Service Responses (Outputs)
queryCommsChannelSpecs ⊕	reportCommsChannelSpecs

See [Section 5.1](#) for an explanation of the inputs and outputs marked with a ⊕.

5.1.7.1 reportCommsChannelSpecs

Description: This operation is used to report the current status of the CommsChannelSpecs service.

Namespace: UMAA::CO::CommsChannelSpecs

Topic: CommsChannelSpecsReport

Data Type: CommsChannelSpecsReportType

Table 44: CommsChannelSpecsReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASatus		
bufferSize	SizeBytes	The buffer size of the comms channel.
commsDeviceIdentifier†	StringShortDescription	The identifier for the comms channel.
maxTransmitPower	ElectricalPower	The maximum amount of power that can be used to transmit on the comms channel.
minimumSNR	SignalToNoiseRatio	The minimum SNR required for the comms channel to function
spectrumRange	FrequencyRangeType	The spectrum range of the comms channel.

5.1.8 CommsChannelStatus

The purpose of this service is to give status info for both sender and receiver side of a comms device. For the sending side it gives info on the messages being buffered to be sent and sender statistics related to send history. For the receiver side, it gives last message received info and statistics on the data coming through the link. It also reports other comms system status of interest.

Table 45: CommsChannelStatus Operations

Service Requests (Inputs)	Service Responses (Outputs)
queryCommsChannel ⊕	reportCommsChannel
queryCommsChannelReceiver ⊕	reportCommsChannelReceiver
queryCommsChannelReceiverStatistics ⊕	reportCommsChannelReceiverStatistics
queryCommsChannelSender ⊕	reportCommsChannelSender
queryCommsChannelSenderStatistics ⊕	reportCommsChannelSenderStatistics

See [Section 5.1](#) for an explanation of the inputs and outputs marked with a ⊕.

5.1.8.1 reportCommsChannel

Description: This operation is used to report the current status of the CommsChannel service.

Namespace: [UMAA::CO::CommsChannelStatus](#)

Topic: [CommsChannelReport](#)

Data Type: [CommsChannelReportType](#)

Table 46: CommsChannelReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASatus		
channelOperationalStatus	CommsChannelOperationalStatusEnumType	The channel operational status.

Attribute Name	Attribute Type	Attribute Description
downTime	DurationSeconds	The amount of time the comms channel has been down. If down.

5.1.8.2 reportCommsChannelReceiver

Description: This operation is used to report the current status of the CommsChannelReceiver service.

Namespace: UMAA::CO::CommsChannelStatus

Topic: CommsChannelReceiverReport

Data Type: CommsChannelReceiverReportType

Table 47: CommsChannelReceiverReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASatus		
messageSize	SizeBytes	The size of the message.
messageSNR	SignalToNoiseRatio	The signal to noise ratio of the received comms signal at time of reception.
messageTime	DateTime	The timestamp of the message.
messageType	StringShortDescription	The message type.
messageID*	NumericGUID	An identifier that uniquely identifies the message.

5.1.8.3 reportCommsChannelReceiverStatistics

Description: This operation is used to report the current status of the CommsChannelReceiverStatistics service.

Namespace: UMAA::CO::CommsChannelStatus

Topic: CommsChannelReceiverStatisticsReport

Data Type: CommsChannelReceiverStatisticsReportType

Table 48: CommsChannelReceiverStatisticsReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASatus		
receiverStatistics	sequence<CommsChannelReceiverStatisticsType>	The statistics representing the last 60 minutes.

5.1.8.4 reportCommsChannelSender

Description: This operation is used to report the current status of the CommsChannelSender service.

Namespace: UMAA::CO::CommsChannelStatus

Topic: CommsChannelSenderReport

Data Type: CommsChannelSenderReportType

Table 49: CommsChannelSenderReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAAStatus		
bufferPercentFull	Percent	The amount of the sending queue buffer that is currently allocated to queued messages.
queuedMessages	sequence< CommsChannelMessage >	The messages in the send buffer.

5.1.8.5 reportCommsChannelSenderStatistics

Description: This operation is used to report the current status of the CommsChannelSenderStatistics service.

Namespace: UMAA::CO::CommsChannelStatus

Topic: CommsChannelSenderStatisticsReport

Data Type: CommsChannelSenderStatisticsReportType

Table 50: CommsChannelSenderStatisticsReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAAStatus		
senderStatistics	sequence< CommsChannelSenderStatistics >	The statistics representing the last 60 minutes.

5.1.9 CommsChannelSystemTimeReport

The purpose of this service is to provide the current system time of the comms channel.

Table 51: CommsChannelSystemTimeReport Operations

Service Requests (Inputs)	Service Responses (Outputs)
queryCommsChannelSystemTime ⊕	reportCommsChannelSystemTime

See [Section 5.1](#) for an explanation of the inputs and outputs marked with a \oplus .

5.1.9.1 reportCommsChannelSystemTime

Description: This operation is used to report the current status of the CommsChannelSystemTime service.

Namespace: UMAA::CO::CommsChannelSystemTimeReport

Topic: CommsChannelSystemTimeReport

Data Type: CommsChannelSystemTimeReportType

Table 52: CommsChannelSystemTimeReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASStatus		
timeSent	DateTime	The latest system time received from the comms channel

5.1.10 ContactFilterConfig

The purpose of this service is to provide a specialized filter that can be used to manage volume for contact reports for external transfer. Enables publishing per configuration information in order to be able to manage comms link bandwidth.

Table 53: ContactFilterConfig Operations

Service Requests (Inputs)	Service Responses (Outputs)
setContactFilterConfig	reportContactFilterConfigCommandStatus
cancelContactFilterConfig\oplus	reportContactFilterCancelConfigCommandStatus\oplus
queryContactFilterConfigAck\oplus	reportContactFilterConfigAck

See [Section 5.1](#) for an explanation of the inputs and outputs marked with a \oplus .

5.1.10.1 reportContactFilterConfigAck

Description: This operation is used to report the current ContactFilter configuration.

Namespace: UMAA::SA::ContactFilterConfig

Topic: ContactFilterConfigAckReport

Data Type: ContactFilterConfigAckReportType

Table 54: ContactFilterConfigAckReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAASStatus		

Attribute Name	Attribute Type	Attribute Description
config	ContactFilterConfigCommandType	The source configuration.

5.1.10.2 reportContactFilterConfigCommandStatus

Description: This operation is used to provide the status of the current ContactFilterConfig command.

Namespace: UMAA::SA::ContactFilterConfig

Topic: ContactFilterConfigCommandStatus

Data Type: ContactFilterConfigCommandStatusType

Table 55: ContactFilterConfigCommandStatusType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatus		

5.1.10.3 setContactFilterConfig

Description: This operation is used to add a new contact filter configuration.

Namespace: UMAA::SA::ContactFilterConfig

Topic: ContactFilterConfigCommand

Data Type: ContactFilterConfigCommandType

Table 56: ContactFilterConfigCommandType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommand		
bearingChangeLimit	Angle	Specifies to only report if contact bearing change estimate change exceeds this value.
headingChangeLimit	Angle	Specifies to only report if contact heading change estimate change exceeds this value.
noChangeTimerUpdate	DurationSeconds	Specifies to only report if no change for this amount of time, report timeStamp update so contact is still considered active.
positionChangeLimit	Distance	Specifies to only report if contact distance change estimate exceeds this value.
rangeChangeLimit	Distance	Specifies to only report if contact range change estimate change exceeds this value.
speedChangeLimit	GroundSpeed	Specifies to only report if contact speed change estimate exceeds this value.

Attribute Name	Attribute Type	Attribute Description
withinRangeofOwnship	Distance	Specifies to only report if contact distance from ownship estimate is less than that value.
messageFilterID*	NumericGUID	The identifier of the message filter.

5.1.11 MessageFilterConfig

The purpose of this service is to provide an independent filter that can be used to manage volume by message type for sending over the link.

Table 57: MessageFilterConfig Operations

Service Requests (Inputs)	Service Responses (Outputs)
setMessageFilterConfig	reportMessageFilterConfigCommandStatus
cancelMessageFilterConfig ⊕	reportMessageFilterCancelConfigCommandStatus ⊕
queryMessageFilterConfigAck ⊕	reportMessageFilterConfigAck

See [Section 5.1](#) for an explanation of the inputs and outputs marked with a ⊕.

5.1.11.1 reportMessageFilterConfigAck

Description: This operation is used to report the current MessageFilter configuration.

Namespace: UMAA::CO::MessageFilterConfig

Topic: MessageFilterConfigAckReport

Data Type: MessageFilterConfigAckReportType

Table 58: MessageFilterConfigAckReportType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAAStatus		
config	MessageFilterConfigCommandType	The source configuration.

5.1.11.2 reportMessageFilterConfigCommandStatus

Description: This operation is used to provide the status of the current MessageFilterConfig command.

Namespace: UMAA::CO::MessageFilterConfig

Topic: MessageFilterConfigCommandStatus

Data Type: MessageFilterConfigCommandStatusType

Table 59: MessageFilterConfigCommandStatusType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatus		

5.1.11.3 setMessageFilterConfig

Description: This operation is used to add a new message filter configuration.

Namespace: UMAA::CO::MessageFilterConfig

Topic: MessageFilterConfigCommand

Data Type: MessageFilterConfigCommandType

Table 60: MessageFilterConfigCommandType Message Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommand		
filter	MessageFilterType	The message filter.
messageType	StringShortDescription	The message type.
messageFilterID*	NumericGUID	The identifier of the message filter.

5.2 Common Data Types

Common data types define DDS types that are referenced throughout the UMAA model. These DDS types are considered common because they can be re-used as the data type for many attributes defined in service interface topics, interface topics, and other common data types. These data types are not intended to be directly published to/subscribed as DDS topics.

5.2.1 UCSMDEInterfaceSet

Namespace: UMAA::UCSMDEInterfaceSet

Description: Defines the common UCSMDE Interface Set Message Fields.

Table 61: UCSMDEInterfaceSet Structure Definition

Attribute Name	Attribute Type	Attribute Description
timeStamp	DateTime	The time at which the data is valid.

5.2.2 UMAACommand

Namespace: UMAA::UMAACommand

Description: Defines the common UMAA Command Message Fields.

Table 62: UMAACommand Structure Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UCSMDEInterfaceSet		
source*	NumericGUID	The unique identifier of the originating source of the command interface.
destination*	NumericGUID	The unique identifier of the destination of the command interface.
sessionID*	NumericGUID	The identifier of the session.

5.2.3 UMAAStatus

Namespace: UMAA::UMAASatus

Description: Defines the common UMAA Status Message Fields.

Table 63: UMAAStatus Structure Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UCSMDEInterfaceSet		
source*	NumericGUID	The unique identifier of the originating source of the status interface.

5.2.4 UMAACommandStatusBase

Namespace: UMAA::UMAACommandStatusBase

Description: Defines the common UMAA Command Status Base Message Fields.

Table 64: UMAACommandStatusBase Structure Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UCSMDEInterfaceSet		
source*	NumericGUID	The unique identifier of the originating source of the command status interface.
sessionID*	NumericGUID	The identifier of the session.

5.2.5 UMAACommandStatus

Namespace: UMAA::UMAACommandStatus

Description: Defines the common UMAA Command Status Message Fields.

Table 65: UMAACommandStatus Structure Definition

Attribute Name	Attribute Type	Attribute Description
Additional fields included from UMAA::UMAACommandStatusBase		
commandStatus	CommandStatusEnumType	The status of the command.
commandStatusReason	CommandStatusReasonEnumType	The reason for the status of the command.
logMessage	StringLongDescription	Human-readable description related to response. Systems should not parse or use any information from this for processing purposes.

5.2.6 DateTime

Namespace: UMAA::Measurement::DateTime

Description: Describes an absolute time. Conforms with POSIX time standard (IEEE Std 1003.1-2017) epoch reference point of January 1st, 1970 00:00:00 UTC.

Table 66: DateTime Structure Definition

Attribute Name	Attribute Type	Attribute Description
seconds	DateTimeSeconds	The number of seconds offset from the standard POSIX (IEEE Std 1003.1-2017) epoch reference point of January 1st, 1970 00:00:00 UTC.
nanoseconds	DateTimeNanoSeconds	The number of nanoseconds elapsed within the current DateTimeSecond.

5.2.7 AllFilterType

Namespace: UMAA::CO::Filter::AllFilterType

Description: This structure is used to specify a message filter that allows all messages to pass.

Table 67: AllFilterType Structure Definition

Attribute Name	Attribute Type	Attribute Description
sendAllMessages	boolean	If set to true, allows all messages to pass.

5.2.8 CommsChannelMessageConfigType

Namespace: UMAA::CO::CommsChannel::CommsChannelMessageConfigType

Description: This is a base structure used to describe a comms channel configuration.

Table 68: CommsChannelMessageConfigType Structure Definition

Attribute Name	Attribute Type	Attribute Description
deadline	DurationSeconds	The amount of time the message must be sent within. Overrides priority.
messageType	StringShortDescription	The message type.
priority	Priority	The message type.
purgeOption	BufferPurgeOptionEnumType	The buffer purge behavior.
commsChannelID*	NumericGUID	Specifies the comms channel to use for this message type.
destination*	NumericGUID	An ID that uniquely identifies the message destination.
messageFilterIDs*	NumericGUID	An sequence of MessageFilterConfig instance identifiers.

5.2.9 CommsChannelMessageType

Namespace: UMAA::CO::CommsChannel::CommsChannelMessageType

Description: This is a base structure used to describe a comms channel message.

Table 69: CommsChannelMessageType Structure Definition

Attribute Name	Attribute Type	Attribute Description
messageSize	SizeBytes	The size of the message.
messageTimeStamp	DateTime	The timestamp of the underlying message.
messageType	StringShortDescription	The message type.
messageID*	NumericGUID	An ID that uniquely identifies the message.

5.2.10 CommsChannelReceiverStatisticsType

Namespace: UMAA::CO::CommsChannel::CommsChannelReceiverStatisticsType

Description: This is a base structure used to provide reception statistics about a comms channel.

Table 70: CommsChannelReceiverStatisticsType Structure Definition

Attribute Name	Attribute Type	Attribute Description
countBytes	SizeBytes	The number of bytes received in the described period.
duration	DurationSeconds	The amount of time the statistics describe.
numMessages	Count	The number of messages received in the described period.

5.2.11 CommsChannelSenderStatisticsType

Namespace: UMAA::CO::CommsChannel::CommsChannelSenderStatisticsType

Description: This is a base structure used to provide transmission statistics about a comms channel.

Table 71: CommsChannelSenderStatisticsType Structure Definition

Attribute Name	Attribute Type	Attribute Description
countBytes	SizeBytes	The number of bytes sent in the described period.
duration	DurationSeconds	The amount of time the statistics describe.
numMessages	Count	The number of messages sent in the described period.

5.2.12 DecimateStructureFilterType

Namespace: UMAA::CO::Filter::DecimateStructureFilterType

Description: This structure is used to specify a message filter that allows filtering by duration since previous message.

Table 72: DecimateStructureFilterType Structure Definition

Attribute Name	Attribute Type	Attribute Description
setSendMostRecent	boolean	If most recent one published was not sent due to waitTime not expired when published, but waitTime has since expired, send the most recent one after waitTime expires (When True, guarantees most recent one is received even if decimated - useful for intermittent messages. Set to False if some type of periodicity in the publishing is normal).
waitTime	DurationSeconds	Once one is sent, do not send another one until waitTime expires (results in decimation of rapid rate messages).

5.2.13 FrequencyRangeType

Namespace: UMAA::CO::CommsChannelSpecs::FrequencyRangeType

Description: This structure is used to describe a frequency range.

Table 73: FrequencyRangeType Structure Definition

Attribute Name	Attribute Type	Attribute Description
maximum	FrequencyHertz	The maximum value of the spectrum range of the comms channel.
minimum	FrequencyHertz	The minimum value of the spectrum range of the comms channel.

5.2.14 MessageFilterType

Namespace: UMAA::CO::Filter::MessageFilterType

Description: **Union Type.** This structure defines a message filter union.

Table 74: MessageFilterType Union(s)

Type Name	Type Description
AllFilterType	This structure is used to specify a message filter that allows all messages to pass.
DecimateStructureFilterType	This structure is used to specify a message filter that allows filtering by duration since previous message.
SendOnlyIfChangedFilterType	This structure is used to specify a message filter that allows only changed fields to pass.

5.2.15 Quaternion

Namespace: BasicTypes::Quaternion

Description: Defines a four-element vector that can be used to encode any rotation in a 3D coordinate system.

Table 75: Quaternion Structure Definition

Attribute Name	Attribute Type	Attribute Description
a		Real number a.
b		Real number b.
c		Real number c.
d		Real number d.

5.2.16 SendOnlyIfChangedFilterType

Namespace: UMAA::CO::Filter::SendOnlyIfChangedFilterType

Description: This structure is used to specify a message filter that allows only changed fields to pass.

Table 76: SendOnlyIfChangedFilterType Structure Definition

Attribute Name	Attribute Type	Attribute Description
sendIfChanged	boolean	If set to true, only send the fields that have been changed.

5.3 Enumerations

Enumerations are used extensively throughout UMAA. This section lists the values associated with each enumeration defined in UCS-UMAA.

5.3.1 BufferPurgeOptionEnumType

Namespace: UMAA::Common::MaritimeEnumeration::BufferPurgeOptionEnumType

Description: A mutually exclusive set of values that defines the purge option of the buffer on a comms channel.

Table 77: BufferPurgeOptionEnumType Enumeration

Enumeration Value	Description
DROP_LOWEST_PRIORITY	Drop lowest priority message on the buffer.
DROP_MOST_RECENT	Drop newest message on the buffer.
DROP_OLDEST	Drop oldest message on the buffer.

5.3.2 CommandStatusReasonEnumType

Namespace: UMAA::Common::MaritimeEnumeration::CommandStatusReasonEnumType

Description: Defines a mutually exclusive set of reasons why a command status state transition has occurred.

Table 78: CommandStatusReasonEnumType Enumeration

Enumeration Value	Description
CANCELED	Indicates a transition to the CANCELED state when the command is canceled successfully.
INTERRUPTED	Indicates a transition to the FAILED state when the command has been interrupted by a higher priority process.
OBJECTIVE_FAILED	Indicates a transition to the FAILED state when the commanded resource is unable to achieve the command's objective due to external factors.
RESOURCE_FAILED	Indicates a transition to the FAILED state when the commanded resource is unable to achieve the command's objective due to resource or platform failure.
RESOURCE_REJECTED	Indicates a transition to the FAILED state when the commanded resource rejects the command for some reason.
SERVICE_FAILED	Indicates a transition to the FAILED state when the commanded resource is unable to achieve the command's objective due to processing failure.
SUCCEEDED	Indicates the conditions to proceed to this state have been met and a normal state transition has occurred.
TIMEOUT	Indicates a transition to the FAILED state when the command is not acknowledged within some defined time bound.
UPDATED	Indicates a transition back to the ISSUED state from a non-terminal state when the command has been updated.
VALIDATION_FAILED	Indicates a transition to the FAILED state when the command contains missing, out-of-bounds, or otherwise invalid parameters.

5.3.3 CommsChannelOperationalStatusEnumType

Namespace: UMAA::Common::MaritimeEnumeration::CommsChannelOperationalStatusEnumType

Description: A mutually exclusive set of values that defines the operational status of the comms channel.

Table 79: CommsChannelOperationalStatusEnumType Enumeration

Enumeration Value	Description
OFF	The comms channel is off.
ON	The comms channel is on.
OPERATIONAL	The comms channel is operational.

5.3.4 CommandStatusEnumType

Namespace: UMAA::Common::MaritimeEnumeration::CommandStatusEnumType

Description: Defines a mutually exclusive set of values that defines the states of a command as it progresses towards completion.

Table 80: CommandStatusEnumType Enumeration

Enumeration Value	Description
CANCELED	The command was canceled by the requestor before the command completed successfully.
COMMANDED	The command has been placed in the resource's command queue but has not yet been accepted.
COMPLETED	The command has been completed successfully.
EXECUTING	The command is being performed by the resource and has not yet been completed.
FAILED	The command has been attempted, but was not successful.
ISSUED	The command has been issued to the resource (typically a sensor or streaming device), but processing has not yet commenced.

5.4 Type Definitions

This section describes the type definitions for UMAA. The table below lists how UMAA defined types are mapped to the DDS primitive types.

Table 81: Type Definitions

Type Name	Primitive Type	Range of Values	Description
Angle	double	fractionDigits=3 maxInclusive=3.141592653589 7932384626433832795 minInclusive=-3.141592653589 7931264626433832795 units=Radian referenceFrame=Counting	Specifies the amount of turning necessary to bring one ray, line or plane into coincidence with or parallel to another. The measurement is stated in radians between -pi and pi.
BooleanEnumType	boolean		A mutually exclusive set of values that defines the truth values of logical algebra.
Count	long	referenceFrame=Counting units=N/A minInclusive=-2147483648 maxInclusive=2147483647 fractionDigits=0	Represents a whole (non-fractional) number that can be positive, negative or zero.
DataTransferRate	double	fractionDigits=3 maxInclusive=N/A minInclusive=0 units=BytesPerSecond referenceFrame=Counting	Represents the number of bits that are conveyed or processed per unit of time measured in kilobits per second.
DateTimeNanoseconds	long	units=Nanoseconds minInclusive=0 maxInclusive=999999999 fractionDigits=0	number of nanoseconds elapsed within the current second.
DateTimeSeconds	longlong	units=Seconds minInclusive=-92233720368547 75807 maxInclusive=92233720368547 75807 fractionDigits=0	seconds offset from the standard POSIX (IEEE Std 1003.1-2017) epoch reference point of January 1st, 1970 00:00:00 UTC.
Distance	double	fractionDigits=3 maxInclusive=401056000 minInclusive=0 units=Meter referenceFrame=Counting	This type stores a distance in meters.
DurationSeconds	double	fractionDigits=6 maxInclusive=37817280 minInclusive=0 units=Seconds referenceFrame=Counting	Represents a time duration in seconds.
ElectricalPower	double	fractionDigits=3 maxInclusive=100000000 minInclusive=0 units=Watt referenceFrame=None	Represents the rate at which electric energy is transferred by an electric circuit measured in watts.

Type Name	Primitive Type	Range of Values	Description
FrequencyHertz	double	fractionDigits=6 maxInclusive=1e10 minInclusive=0.0 units=Hertz referenceFrame=Counting	This type stores Frequency in Hz.
GroundSpeed	double	fractionDigits=3 maxInclusive=299,792,458 minInclusive=-299,792,458 units=MeterPerSecond referenceFrame=TrueNorth	The magnitude of the horizontal velocity vector of an aircraft relative to the ground.
LargeCollectionSize	long	fractionDigits=0 maxInclusive=2147483647 minInclusive=0 units=N/A	Specifies the size of a Large Collection.
NumericGUID	octet[16]	units=N/A minInclusive=0 maxInclusive=(2^{128})-1 fractionDigits=0	Represents a 128-bit number according to RFC 4122 variant 2.
Percent	double	fractionDigits=3 maxInclusive=1000 minInclusive=0 units=Percent referenceFrame=Counting	Defines a percentage where 100% = 100.0. Values greater than 100% are allowed.
Priority	long	fractionDigits=0 maxInclusive=255 minInclusive=0	Represents the priority as a positive integer. Low numbers represent low priority while higher numbers represent high priority.
SignalToNoiseRatio	double	fractionDigits=6 maxInclusive=100 minInclusive=0 units=Decibel	Describes the signal to noise ratio.
SizeBytes	long	maxInclusive=1000000000 minInclusive=0 units=Byte referenceFrame=Counting fractionDigits=0	Represents an amount of data and is stored in bytes.
StringLongDescription	string	length=4095 units=N/A minInclusive=N/A maxInclusive=N/A	Represents a long format description.
StringShortDescription	string	length=1023 units=N/A minInclusive=N/A maxInclusive=N/A	Represents a short format description.

A Appendices

A.1 Glossary

Note: This glossary aims to define terms that are uncommon, or have a special meaning in the context of UMAA and/or the DoD. This glossary covers the complete UMAA specification. Not every word defined here appears in every ICD.

Almanac Data (GPS)	A navigation message that contains information about the time and status of the entire satellite constellation.
Coulomb	The SI unit of electric charge, equal to the quantity of electricity conveyed in one second by a current of one ampere.
Ephemeris Data (GPS)	A navigation message used to calculate the position of each satellite in orbit.
Glowplug or Glow Plug	A heating device used to aid in starting diesel engines.
Interoperability	1) The ability to act together coherently, effectively, and efficiently to achieve tactical, operational, and strategic objectives. 2) The condition achieved among communications-electronics systems or items of communications-electronics equipment when information or services can be exchanged directly and satisfactorily between them and/or their users.
Mean Sea Level	The average height of the surface of the sea for all stages of the tide; used as a reference for elevations.
Middleware	A type of computer software that provides services to software applications beyond those available from the operating system. Middleware makes it easier for software developers to implement communication and input/output, so they can focus on the specific purpose of their application.
SoaML	The Service oriented architecture Modeling Language (SoaML) specification that provides a metamodel and a UML profile for the specification and design of services within a service-oriented architecture. The specification is managed by the Object Management Group (OMG).

A.2 Acronyms

Note: This acronym list is included in every ICD and covers the complete UMAA specification. Not every acronym appears in every ICD.

ADD	Architecture Design Description
AGL	Above Sea Level
ASF	Above Sea Floor
BSL	Below Sea Level
BWL	Beam at Waterline
C2	Command and Control
CMD	Command
CO	Comms Operations
CPA	Closest Point of Approach
CTD	Conductivity, Temperature and Depth
DDS	Data Distribution Service
DTED	Digital Terrain Elevation Data
EGM	Earth Gravity Model
EO	Engineering Operations
FB	Feedback
GUID	Globally Unique Identifier
HM&E	Hull, Mechanical, & Electrical
ICD	Interface Control Document

ID	Identifier
IDL	Interface Definition Language Specification
IMO	International Maritime Organization
INU	Inertial Navigation Unit
LDM	Logical Data Model
LOA	Length Over All
LRC	Long Range Cruise
LWL	Length at Waterline
MDE	Maritime Domain Extensions
MEC	Maximum Endurance Cruise
MM	Mission Management
MMSI	Maritime Mobile Service Identity
MO	Maneuver Operations
MRC	Maximum Range Cruise
MSL	Mean Sea Level
OMG	Object Management Group
PIM	Platform Independent Model
PMC	Primary Mission Control
PNT	Precision Navigation and Timing
PO	Processing Operations
PSM	Platform Specific Model
RMS	Root-Mean-Square
RPM	Revolutions per minute
RTPS	Real Time Publish Subscribe
RTSP	Real Time Streaming Protocol
SA	Situational Awareness
SEM	Sensor and Effector Management
SO	Support Operations
SoaML	Service-oriented architecture Modeling Language
STP	Standard Temperature and Pressure
UCS	Unmanned Systems Control Segment
UMAA	Unmanned Maritime Autonomy Architecture
UML	Unified Modeling Language
UMS	Unmanned Maritime System
UMV	Unmanned Maritime Vehicle
UxS	Unmanned System
WGS84	Global Coordinate System
WMM	World Magnetic Model
WMO	World Meteorological Organization